
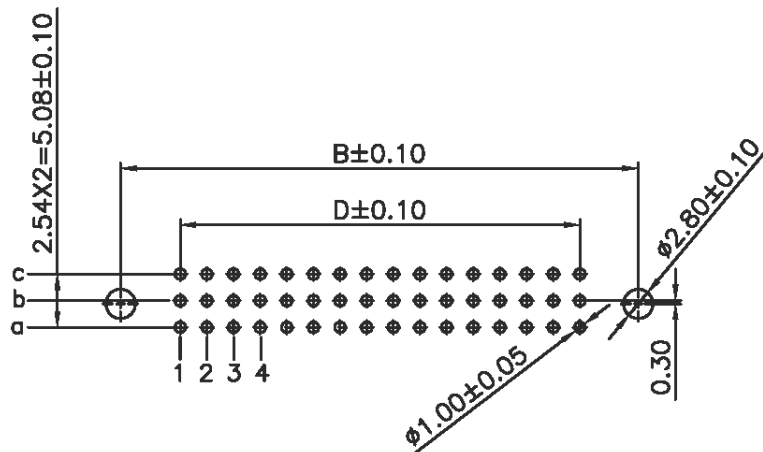
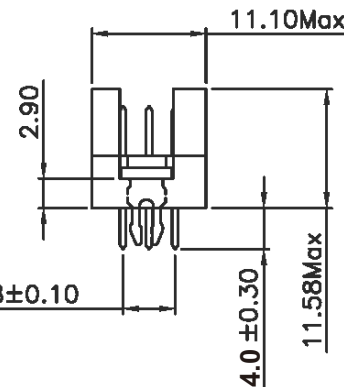
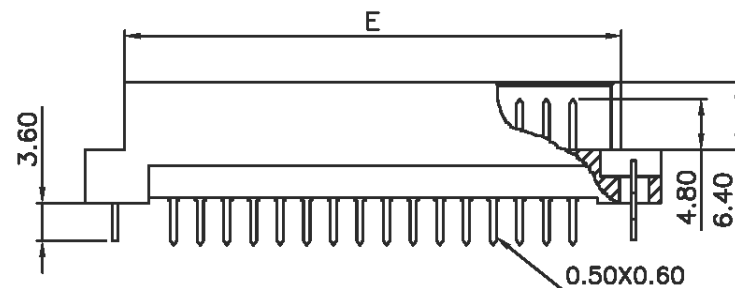
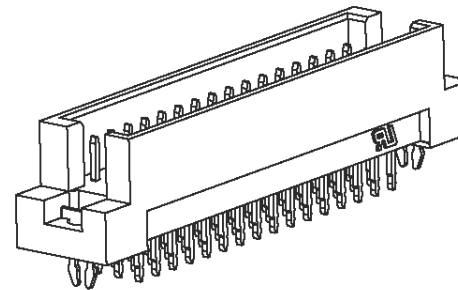


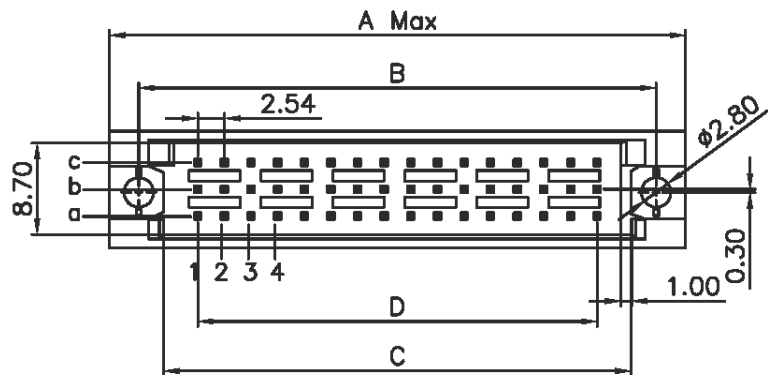

P.C. Board Layout

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +125°C.

*RoHS Compliant

Dimension					
Position	A	B	C	D	E
48/32/16	55.0	49.36	44.60	38.10	47.40
30/20/10	39.8	34.12	29.36	22.86	32.16
Pitch	Position	Rows with Contacts	Contact Arrange		
2.54mm	48	a b c			
	32	a - c			
	30	a b c			
	20	a - c			
	16	a - -			
	10	a - - -			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

UC-PDZS15-xXxx-LF
SERIES
MALE
DIP 180°
CLIP
SEMI GOLD 15u"
LEADFREE
3X16:48WAY
2X16:32WAY
3X10:30WAY
2X10:20WAY
1X16:16WAY
1X10:10WAY

DESCRIPTION: