

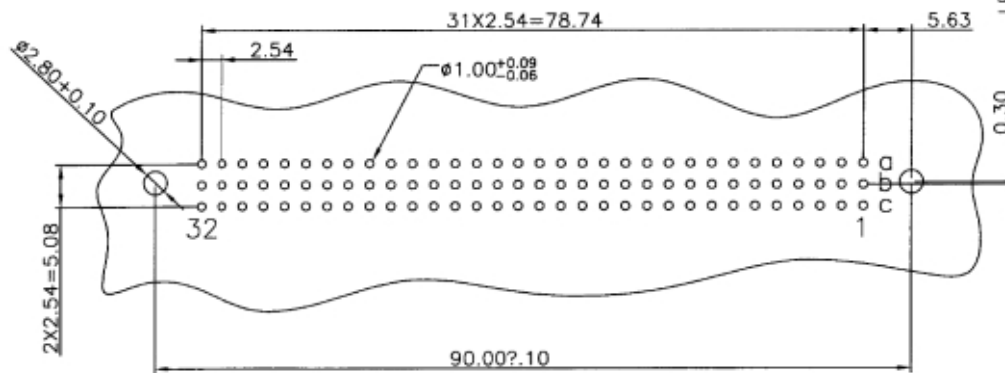
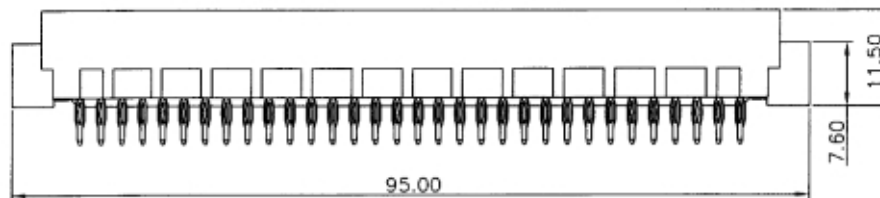
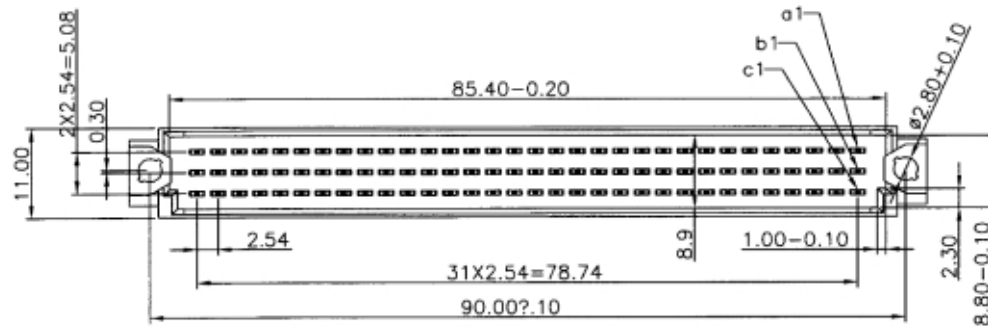


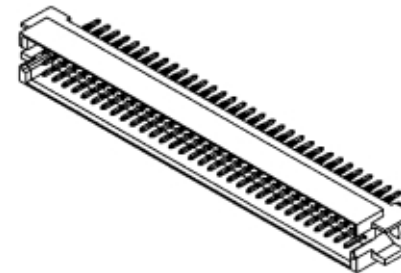

LEAD LENGTH	
A	4.6 mm
C	13.0 mm
D	17.0 mm



SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u"~200u" Tin/Lead or 100u"~200u" Tin(Lead Free)

ELECTRICAL
 Operation Voltage: 300 VAC Max.
 Current Rating: 1.5 Amps Max.
 Contact Resistance: 20 mohms Max.
 Insulation Resistance: 1000 Mohms Min @ 500 VDC
 Dielectric Withstanding Voltage: 500 VAC / Minute
 Temperature Range: -55°C To +125°C

RECOMMENDED P.C.B. LAYOUT
 TOLERANCES: ±.05mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

UB-PPxx-3X32-LF
 SERIES | LEADFREE
 96 WAY
 04:4.6mm
 13:13.0mm
 17:17.0mm
 180° PRESS FIT

DESCRIPTION: