

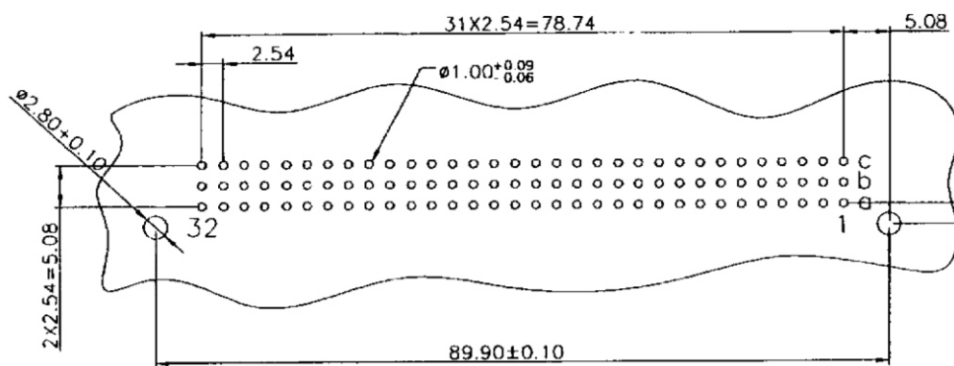
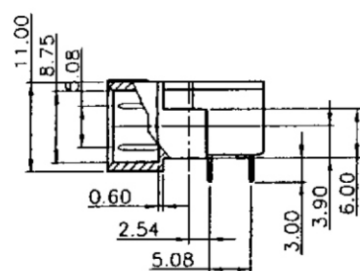


Moulded Raised Area(Height=0.2 m/m) with "TEPCG" Recessed.

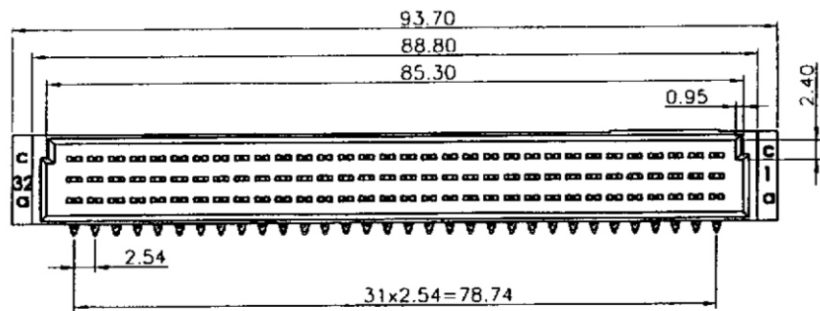

RECOMMENDED P.C.B. LAYOUT

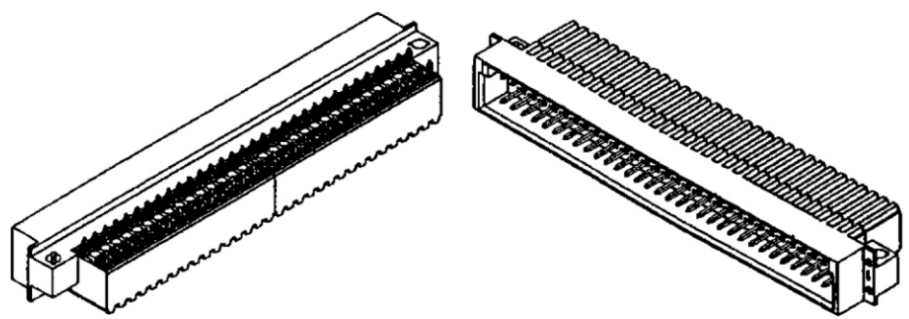

**SPECIFICATION**

**MATERIAL**

Insulator: PBT, rated UL94V-0  
Contacts: Brass

**CONTACT PLATING**

Underplate: 50µ" Nickel  
Contact area: 1µ"~30µ" Selective gold  
Solder tails area: 100µ" Tin/Lead

**ELECTRICAL**

Operation voltage: 250 VAC max.  
Current rating: 1.5 Amps max.  
Contact resistance: 20 mohms max.  
Insulation resistance: 1000 Mohms min @ 500 VDC  
Dielectric withstanding voltage: 1000 VAC / minute  
Operating temperature: -55°C TO +125°C

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

PJECTION

照片框

**ORDER INFORMATION**

UC-PQ-2X32-LF  
SERIES | LEADFREE  
64 WAY  
90° PRESS FIT  
MALE

DESCRIPTION: