




Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000M Ω min. at DC 500V.
 Contact Resistance: 20m Ω max. at DC 100mA.
 Operating Temperature: -55 $^{\circ}$ C~+125 $^{\circ}$ C .

***RoHS Compliant**

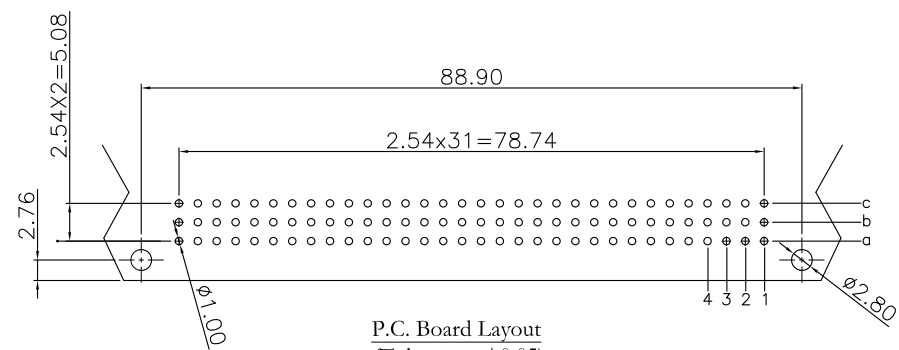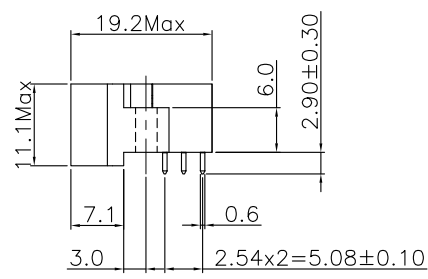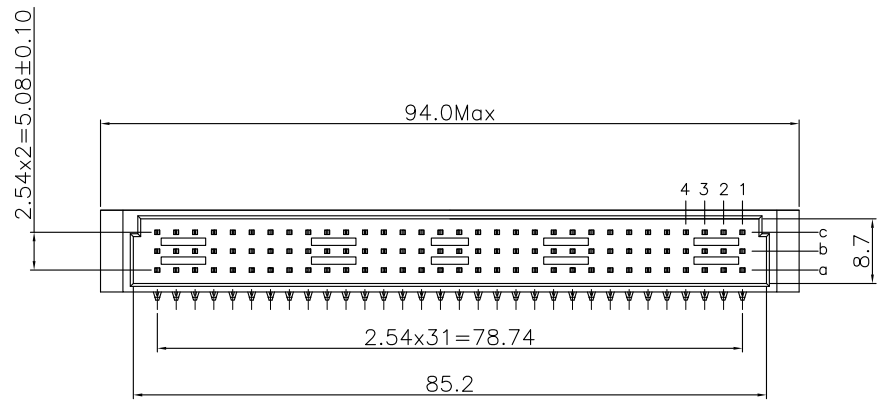

P.C. Board Layout
 (Tolerances: ± 0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X. ± 0.50
CHECKED BY GENIUS		.X ± 0.25
UNIT / mm	SCALE 1 : 1	.XX ± 0.15
DATE		.XXX \pm
SIZE A4	PJECTION	ANG \pm



ORDER INFORMATION

UC-PQ-3X32-LF
 SERIES LEADFREE
 96 WAY
 90° PRESS FIT
 MALE

DESCRIPTION: