
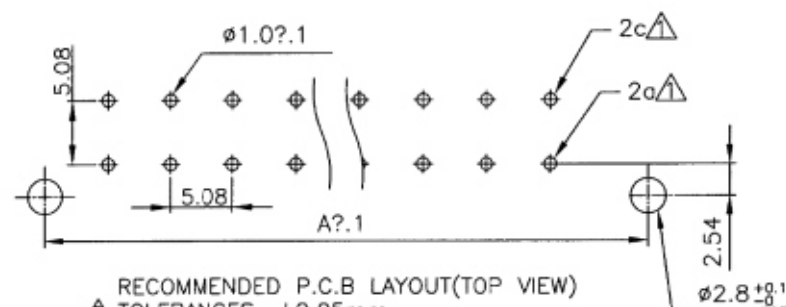
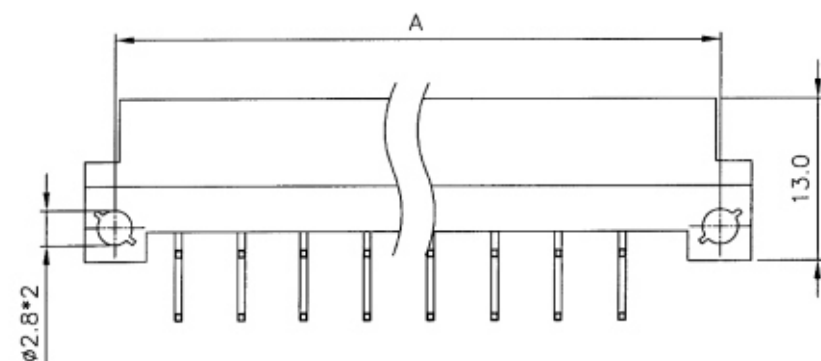


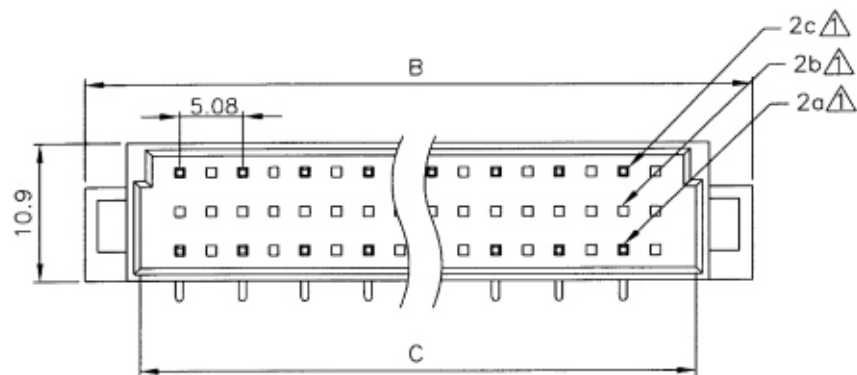

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

SPECIFICATION

MATERIAL

- △ Insulator: Thermal Plastic UL94V-0
- △ Contacts: Copper Alloy
- △ CONTACT PLATING
- Underplate: 50u"~100u" Nickel
- Contact Area: 1u"~30u" Selective Gold
- Solder Tails Area: 100u"~200u" Tin/Lead(Brighten Tin)or
100u"~200u" Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL

- Operation Voltage: 250 VAC Max.
- Current Rating: 2 Amps @ 20°C
- Contact Resistance: 20 Mohms Max.
- Insulation Resistance: 3000 Mohms Min @ 500 VDC
- Dielectric Withstanding Voltage: 1000 VAC / Minute
- Temperature Range: -55°C TO +125°C

NOTE:

PART NO.	A	B	C
UC-PR-2X32EO	88.90	94	85.5
UC-PR-2X16EO	48.26	53.5	44.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UC-PR-2XxxEO-LF
SERIES | LEADFREE
2X32:64 WAY
2X16:32 WAY
DIP 90°
MALE

DESCRIPTION: