

Technial data

EURO DIN 41612

Housing

Contact

Operating temperature

Contact resistance

Insulator resistance

Current rating

Withstanding voltage

Contact Rating:

Signal

PBT & 30%Glass Fiber(UL94-0)

Male : Brass

Female : Phosphor Bronze

-55°C~+105°C






30m(ohm)max.at DC 500V

1000M(ohm)min.at DC 500V

2 AMP

AC 1000V for 1 minute

Class 3

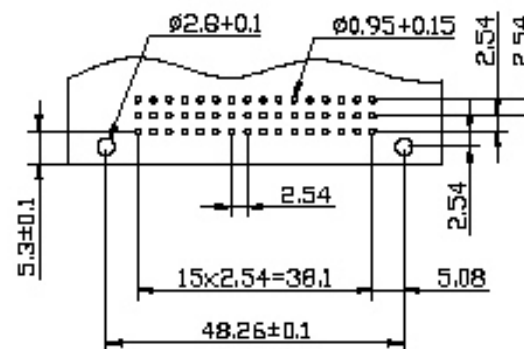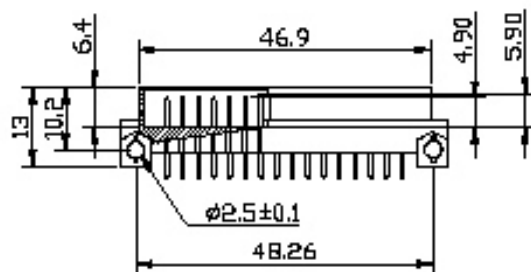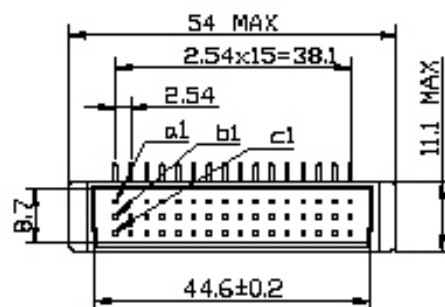

Mating side

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
a	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80
b	4.80	4.80	4.80	4.80	4.80	4.80	5.00	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80
c	4.80	4.80	4.80	4.80	4.80	4.80	5.00	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80	4.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

UC-PR-3X16PM-LF
SERIES
LEADFREE
PRET MATING
48 WAY
DIP 90°
MALE

DESCRIPTION: