

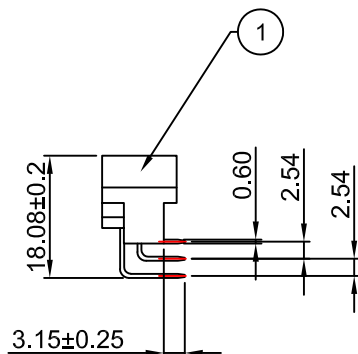
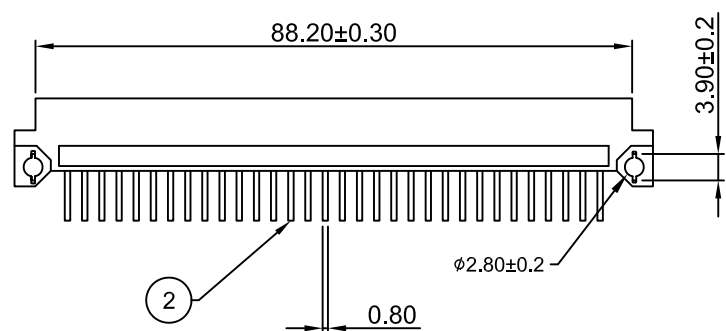


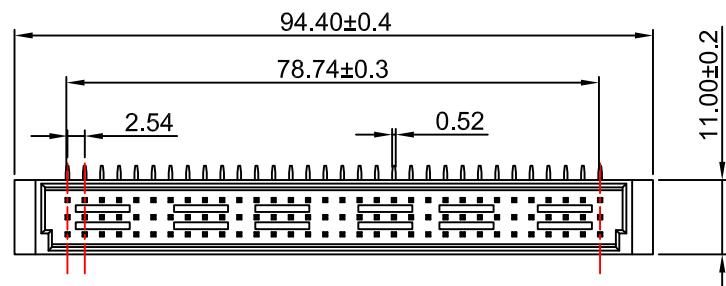

Notes:

1. Current Rating : 3A
2. Contact Resistance : 30mΩ Max.
3. Insulator Resistance : 1000MΩ Min.
4. Withstanding Voltage : 1000V AC for 1 Minute.
5. Temperature Range : -45~+105°C

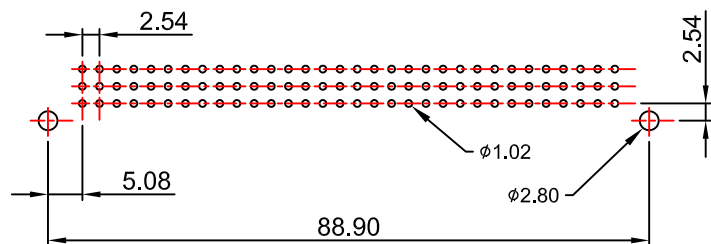

PCB LAYOUT

2	Contact	Brass	XX
1	Housing	PBT, 94V-0	1
No.	Part Name	Specifications	Qt'y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.25

.XX ± 0.20

.XXX ± 0.15

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UC-PR-3X32-LF
SERIES | LEADFREE
96 WAY
DIP 90°
MALE

DESCRIPTION: DIN41612 DIP, Male, R/A, Type C