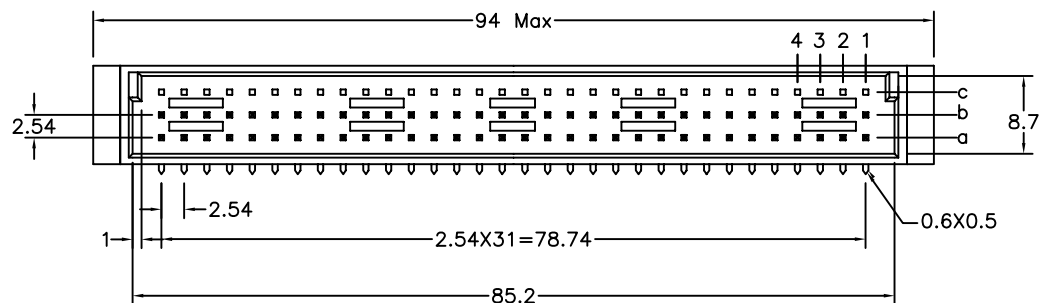

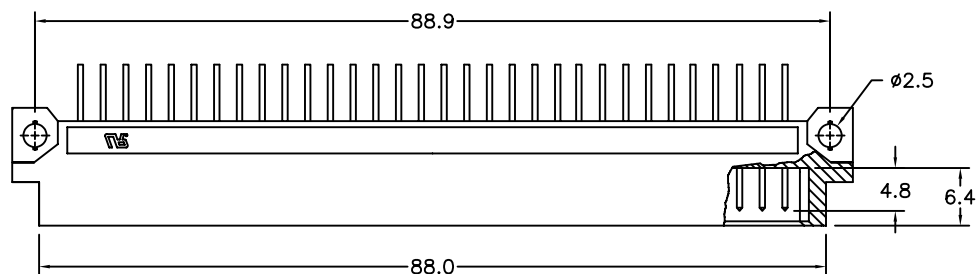


P.C. Board Layout
(Tolerance: ± 0.05)

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30m Ω max. at DC 100mA.

Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$.

***RoHS Compliant**

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX $\pm$

ANG $\pm$



ORDER INFORMATION

UC-PR-3X32EC-LF

SERIES
LEADFREE
EMPTY C ROW
96WAY
DIP 90°
MALE

DESCRIPTION: