
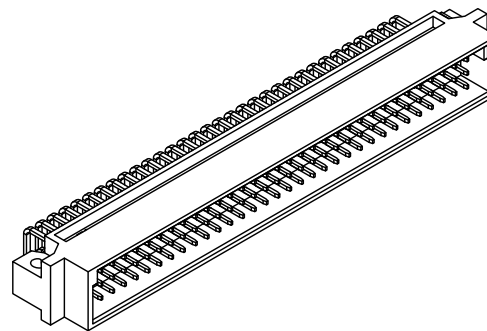


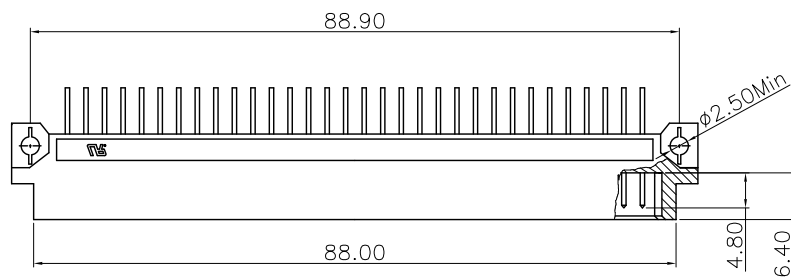

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

***RoHS Compliant**

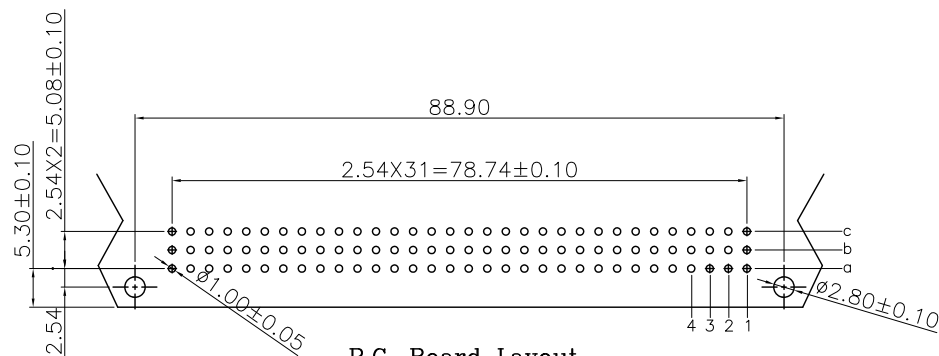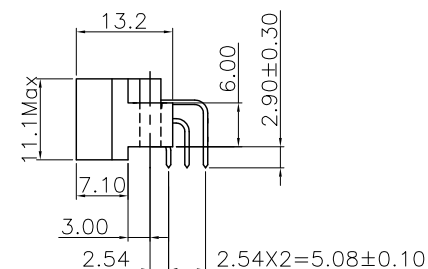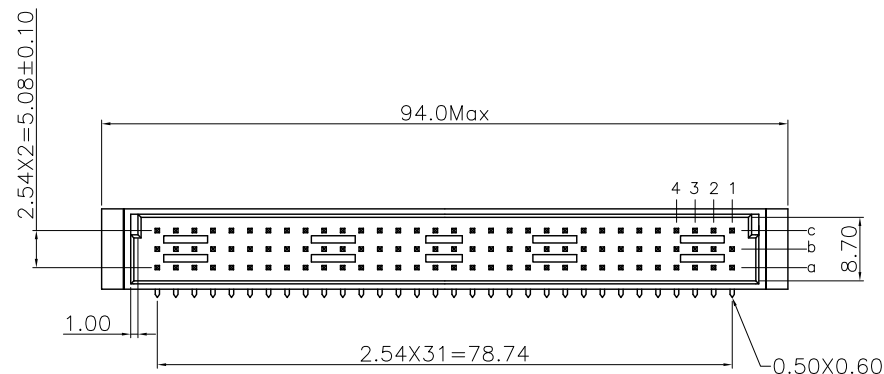

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	96	a b c		UC-PR-3X32
	64	a - c		UC-PR-2X32
	32	a - -		UC-PR-1X32

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UC-PR-xX32-LF
SERIES LEADFREE
1X32:32WAY
2X32:64WAY
3X32:96WAY
DIP 90°
MALE

DESCRIPTION: