




**Material:**

Housing: 30% Glass filled PBT UL94V-0.  
 Contacts: Brass.  
 Lock: Phosphor Bronze.

**Electrical Characteristics:**

Current Rating: 2 AMP.  
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.  
 Insulator Resistance: 1000M $\Omega$  min. at DC 500V.  
 Contact Resistance: 30m $\Omega$  max. at DC 100mA.  
 Operating Temperature: -55°C ~ +105°C .

**\*RoHS Compliant**

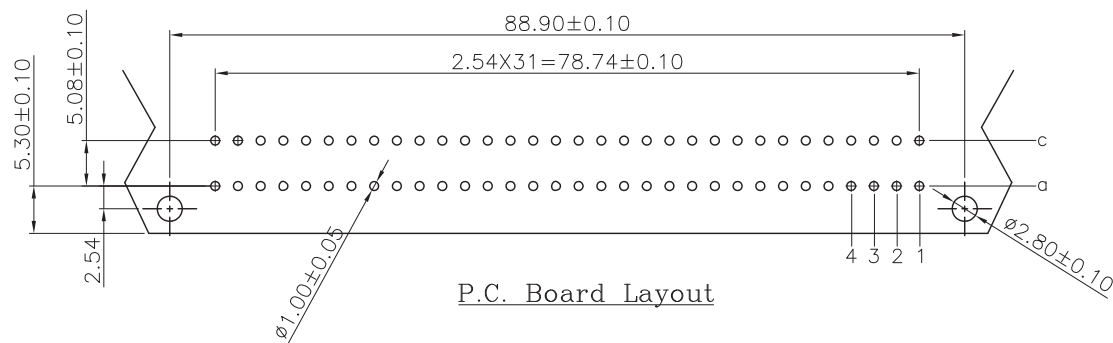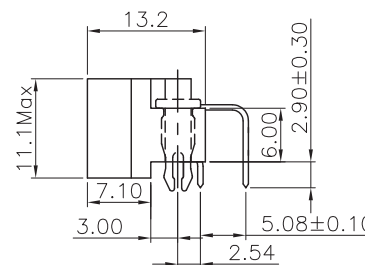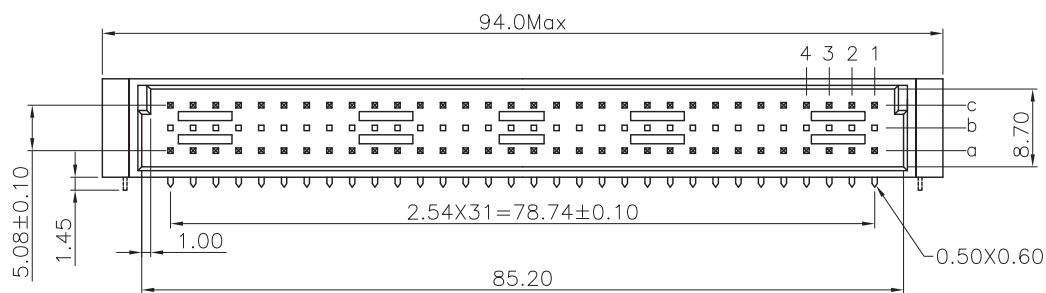

P.C. Board Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION

照片框

**ORDER INFORMATION**

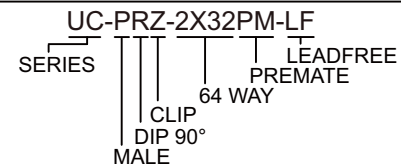

DESCRIPTION: