


**Material:**

Housing: 30% Glass filled PBT UL94V-0.  
Contacts: Brass.

**Electrical Characteristics:**

Current Rating: 2 AMP.  
Dielectric Withstanding Voltage: AC 1000V For 1 minute.  
Insulator Resistance: 1000MΩmin. at DC 500V.  
Contact Resistance: 30mΩmax. at DC 100mA.  
Operating Temperature: -55°C ~ +105°C.

**\*RoHS Compliant**

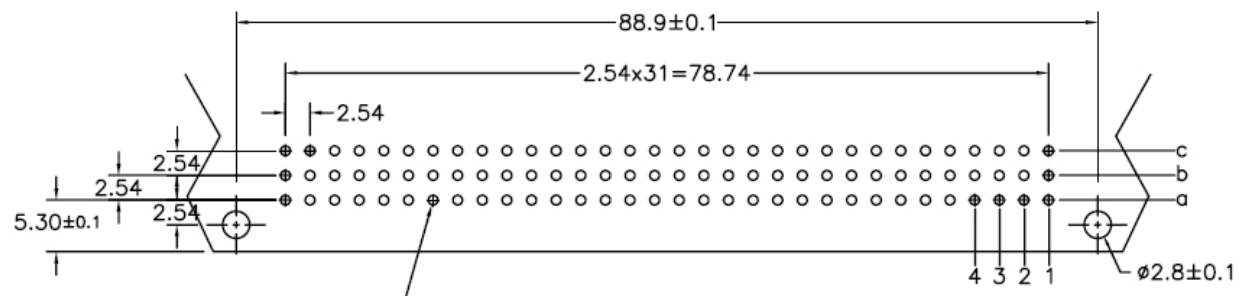

**P.C. Board Layout**  
(Tolerance:±0.05)

**RoHS Compliant**


TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
**煜倫股份有限公司**  
www.morethanall.com

DRAWING BY CY		X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	



**ORDER INFORMATION**

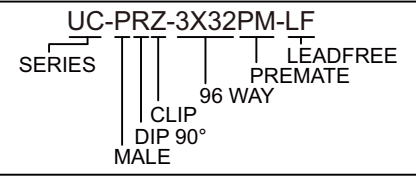

DESCRIPTION: