
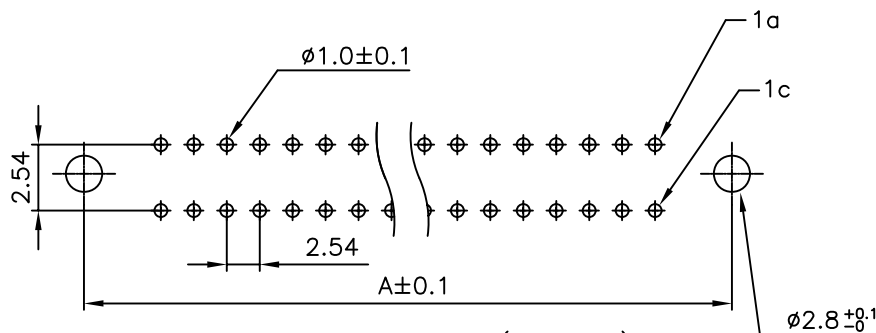

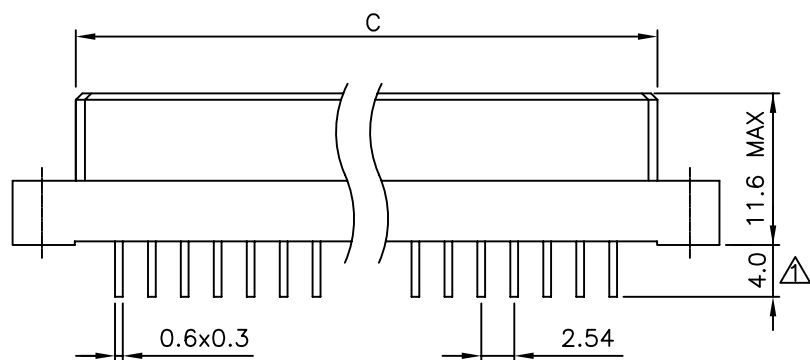


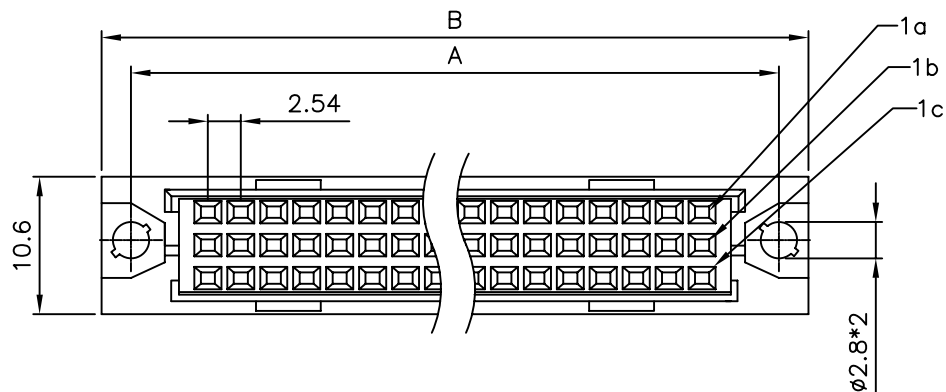

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

△ SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0 (standard)

Contacts: Brass (Male) ; Phosphor Bronze (Female)

Rivet, Boardlock: Copper alloy

CONTACT PLATING

Underplate: 40m Nickel

Contact area: 1m~30m Selective gold

Solder tails area: 100m Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.

Current rating: 3 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

NOTE:

PART NO.	A	B	C
UC-SD-2X32	90.00	95.0	85.0
UC-SD-2X16	50.00	55.0	44.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UC-SD-2Xxx-LF
SERIES LEADFREE
2X16:32 WAY
2X32:64 WAY
DIP 180°
FEMALE

DESCRIPTION: DIP 41612 (THREE ROW) MALE 96PIN