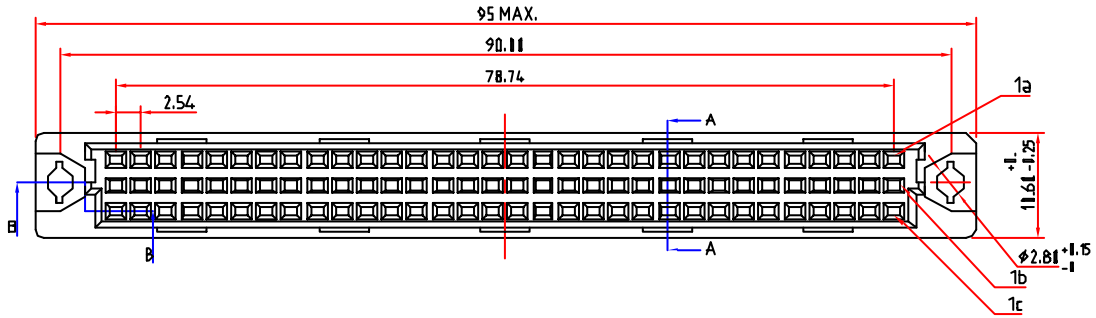

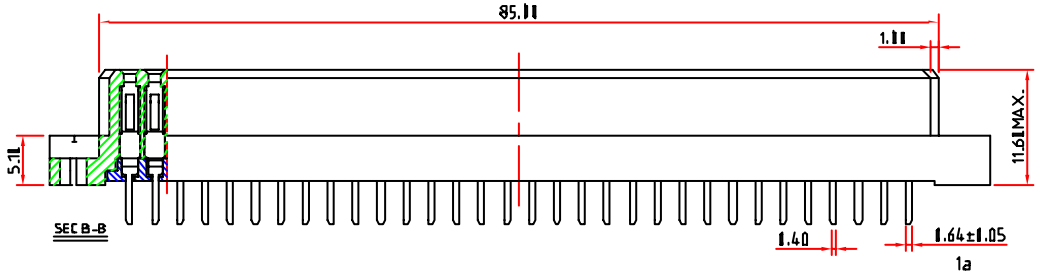



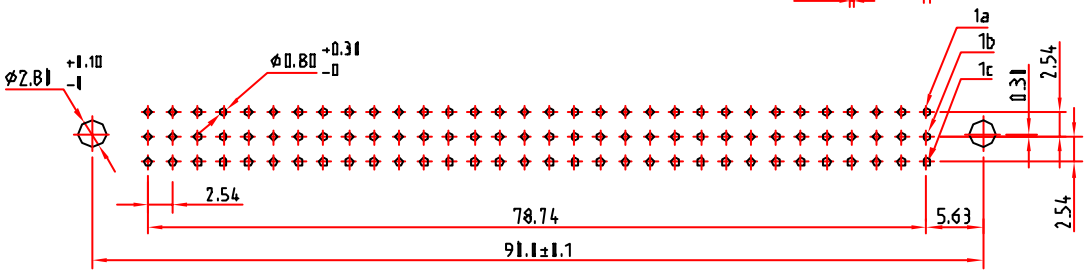

RECOMMENDED P.C.BOARD LAYOUT



SEC A-A

NOTE:
1. WITHDRAWL FORCE PER CONTACT: 0.015kg MIN.
2. TEMPERATURE RANGE: -55°C TO +125°C.
3. CURRENT RATING: 20°C 2A, 71°C 1A, 101°C 0.5A
4. CONTACT RESISTANCE: 30 MILLIOHMS MAX. AT DC100mA
5. DIELECTRIC VOLTAGE: AC 1001V FOR 1 MINUTE
6. INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT DC511V
7. OPERAITING VOLTAGE: 250VAL

ITEM	Q'TY	DESCRIPTION
4	OPTIONAL	BOARD-LOCK : BRASS, 100u" MIN. TIN PLATING
3	NO. OF POS	CONTACT : PHOSPHOR BRONZE, NICKEL PLATING OVER ALL AT 51u" MIN SOLDER AREA PLATING: 101u" MIN. TIN, CONTACT AREA PLATING GOLD
2	1	SPACER : PBT UL94V-1, COLOR GRAY
1	1	HOUSING : PBT UL94V-1, COLOR GRAY

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UC-SD-3X32-LF
SERIES
DIP 180°
FEMALE
96 WAY
LEADFREE

DESCRIPTION: