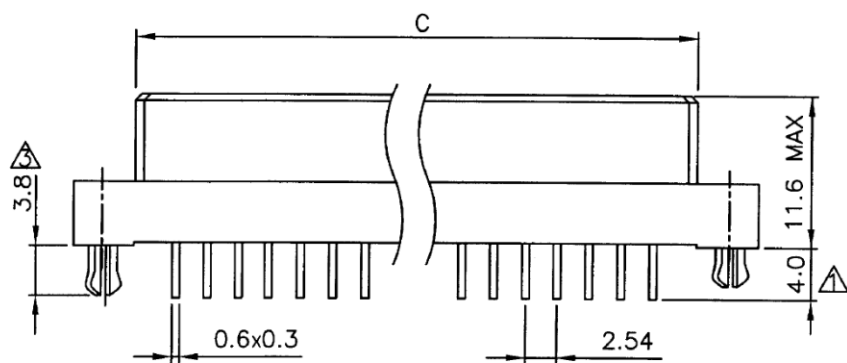
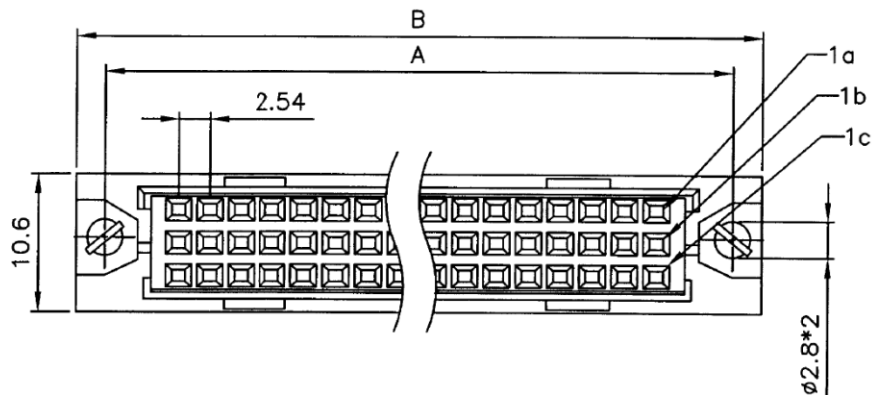


RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: $20\mu\text{m} \sim 100\mu\text{m}$ Nickel

Contact Area: $1\mu\text{m} \sim 30\mu\text{m}$ Selective Gold

Solder Tails Area: $100\mu\text{m} \sim 200\mu\text{m}$ Tin(Lead Free)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating:

TEMP(°C)	20	70	100
CURRENT	2.0A	1.6A	1.0A

Contact Resistance: 20 mohms Max.

Insulation Resistance: 3000 Mohms Min. @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Temperature Range: -55°C TO $+125^{\circ}\text{C}$

NOTE:

PART NO.	A	B	C
UC-SDZ-3X32	90.00	95.0	85.0
UC-SDZ-3X16	49.0	54.3	44.4

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX $\pm$

DATE

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UC-SDZ-3Xxx-LF

SERIES
LEADFREE
3X32:96 WAY
3X16:48 WAY
CLIP
DIP 180°
FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com