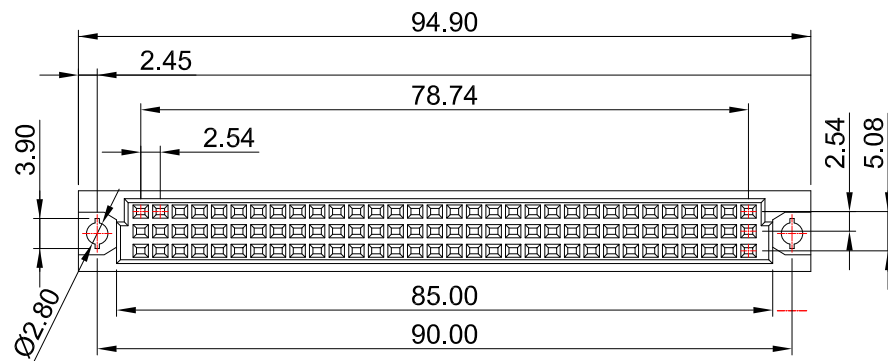



PCB LAYOUT

Notes:

1. Current Rating : 3.0A
2. Contact Resistance : 30mΩ Max.
3. Insulator Resistance : 1000MΩ Min / 100V DC
4. Withstanding Voltage : 1000V AC for 1 Minute.
5. Operating Temperature : -40~105°C

Dip Length DIM. H :

H 4.0 = 040 ; H 17.0 = 170  
H 5.5 = 055 ; H 20.2 = 202  
H13.0= 130 ; H 25.0 = 250  
H15.0= 150 ; H 40.0 = 400



| 2   | Contact   | Phosphor Bronze    | xxx  |
|-----|-----------|--------------------|------|
| 1   | Housing   | PBT UL 94V-0, Gray | 1    |
| No. | Part Name | Specifications     | Qt'y |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UC-SDxxx-3X32-LF  
SERIES LEADFREE  
96 WAY  
FEMALE  
DIP 180°  
040:DIP 4.0mm 170:DIP 17.0mm  
055:DIP 5.5mm 202:DIP 20.2mm  
130:DIP 13.0mm 250:DIP 25.0mm  
150:DIP 15.0mm 400:DIP 40.0mm

DESCRIPTION: DIN 41612, DIP, Female, Vertical