


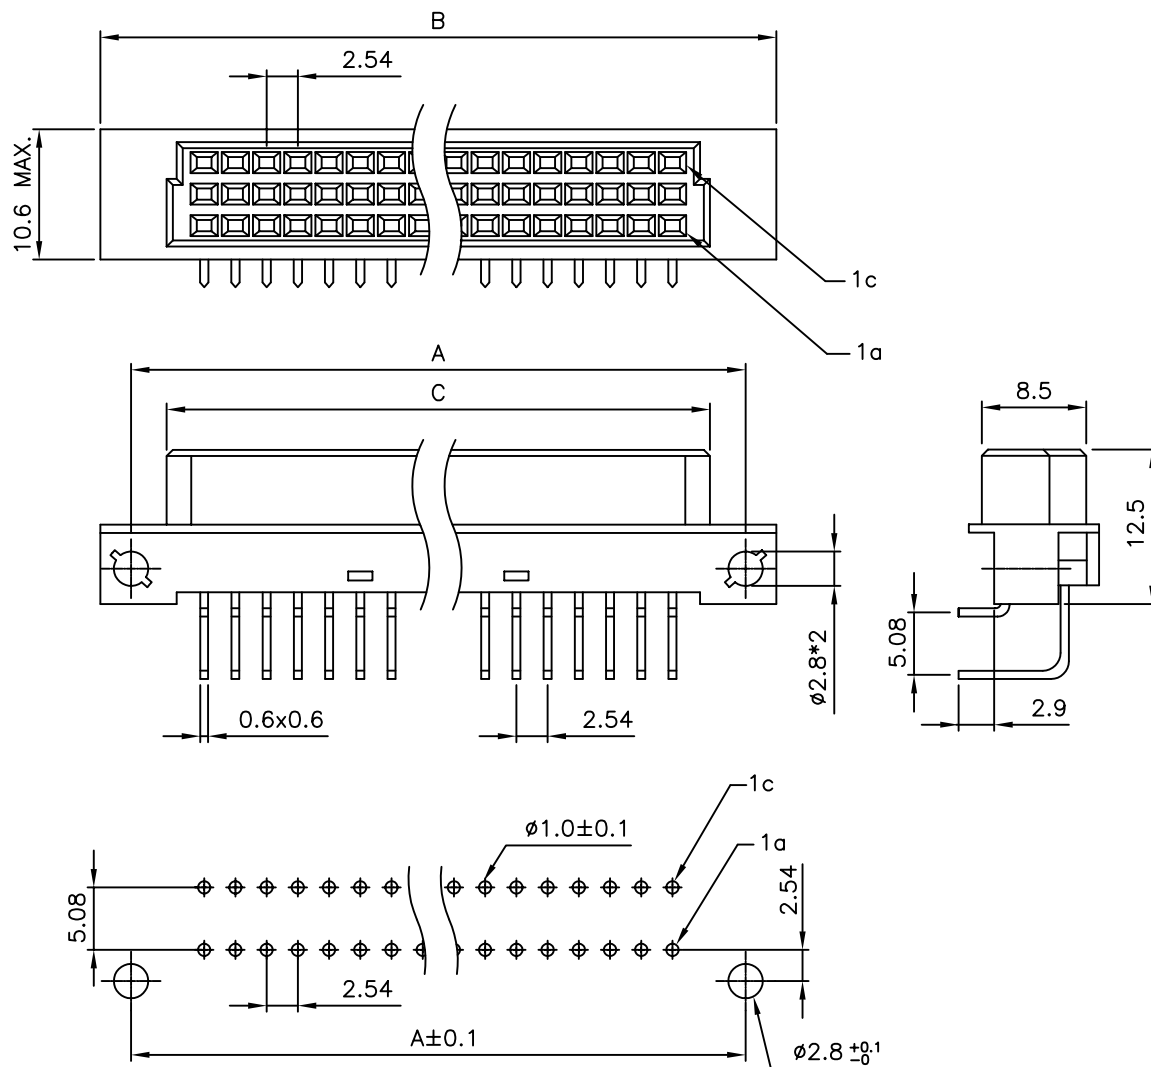

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

SPECIFICATION

MATERIAL

Insulator: PBT & glass fill reinforced , rated UL94V-0

Contacts: Brass(Male), Phosphor Bronze(Female)

Rivet,Boardlock: Copper alloy

CONTACT PLATING

Contact area: Gold flash

Solder tails: 100u" Tin over 40u" Nickel

ELECTRICAL

Operation voltage: 250 VAC max.

Current rating: 3 Amps max.

Contact resistance: 20 mohms $T_{max} 105^{\circ}\text{C}$

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55°C

NOTE:

PART NO.	A	B	C
UC-SR-2X32	88.90	94	85.0
UC-SR-2X16	48.26	54	44.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

UC-SR-2Xxx-LF
SERIES | LEADFREE
2X16:32 WAY
2X32:64 WAY
DIP 90°
FEMALE

DESCRIPTION: DIN 41612 (THREE ROW) FEMALE RIGHT ANGLE 64PIN & 32PIN