
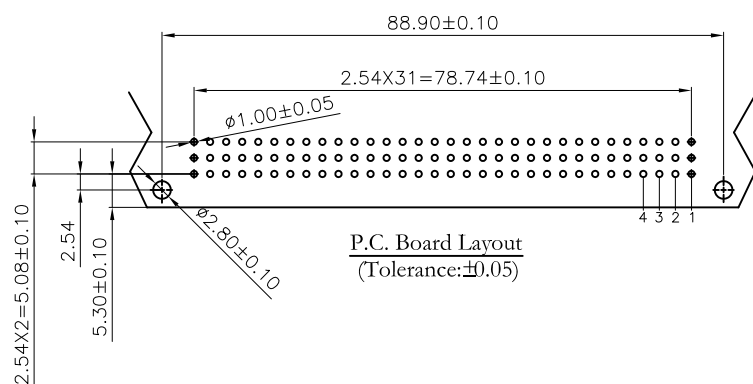
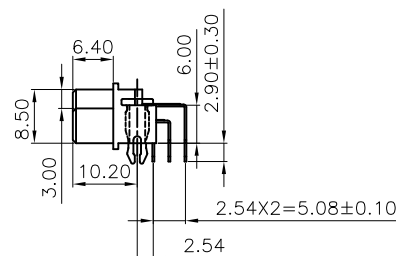
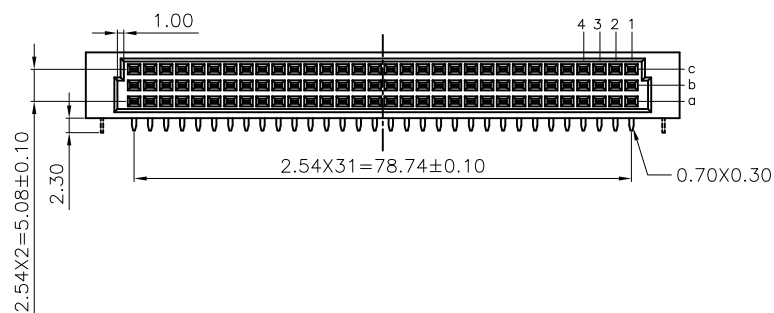
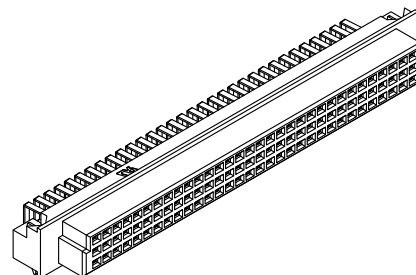


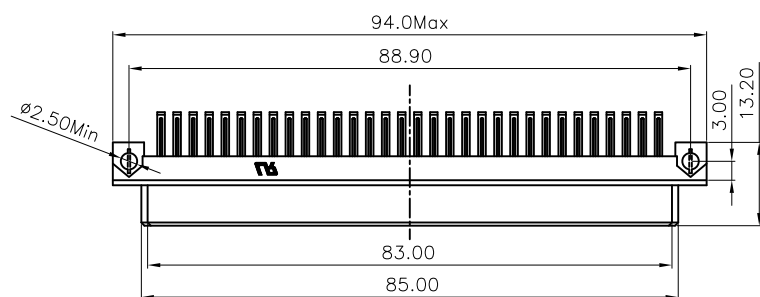

P.C. Board Layout
(Tolerance: ±0.05)

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30 mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+105°C .

***RoHS Compliant**

UC-SRZ-3X32		a b c	96	2.54mm
UC-SRZ-2X32		a - c	64	
UC-SRZ-1X32		a - -	32	
UC-SRZ-3X32E0		a b c	48	5.08mm
UC-SRZ-2X32E0		a - c	32	
UC-SRZ-1X32E0		a - -	16	
P/N	Contact Arrange	Rows With Contacts	Position	Pitch

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UC-SRZ-xXxx-LF
SERIES | LEADFREE
FEMALE | CLIP
DIP 90°
1X32:32 WAY
2X32:64 WAY
3X32:96 WAY

DESCRIPTION: