


# Dimensions


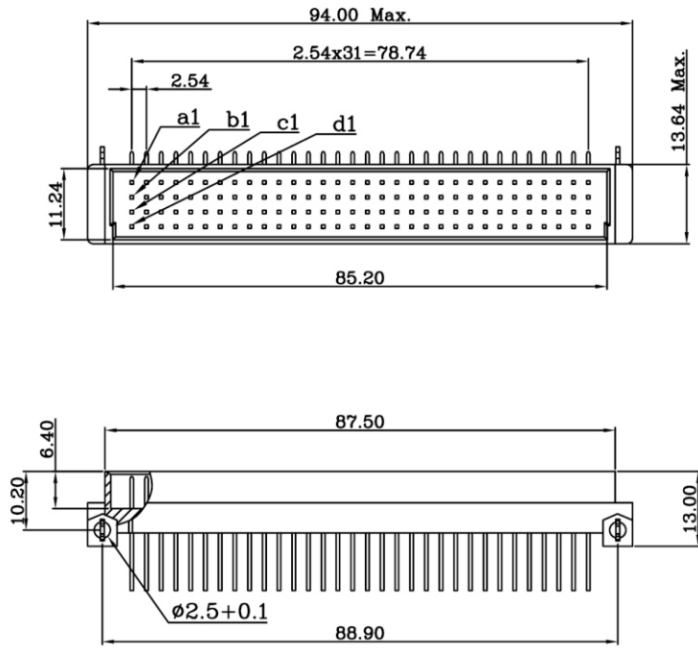


## DIN 41612 EUROCARD CONNECTORS

### Right Angle Male Type C Connectors

#### Technical data

EURO DIN 41612: Signal  
 Housing: PBT & 30%Class Fiber(UL94-0)  
 Contact: Male : Brass  
 plating: Contact: 2u"Au on Contact area, Tin100u" on the rest area,over50u"Ni  
 Boardlock: Brass Tin100u" over 40u"Ni  
 Operating temperature: -55°C~+105°C  
 Contact resistance: 30m(ohm)max.at DC 500V  
 Insulator resistance: 1000M(ohm)min.at DC 500V  
 Current rating: 2 AMP  
 Withstanding voltage: AC 1000V for 1 minute  
 Contact Rating: Class 3  
 RoHS Compliant

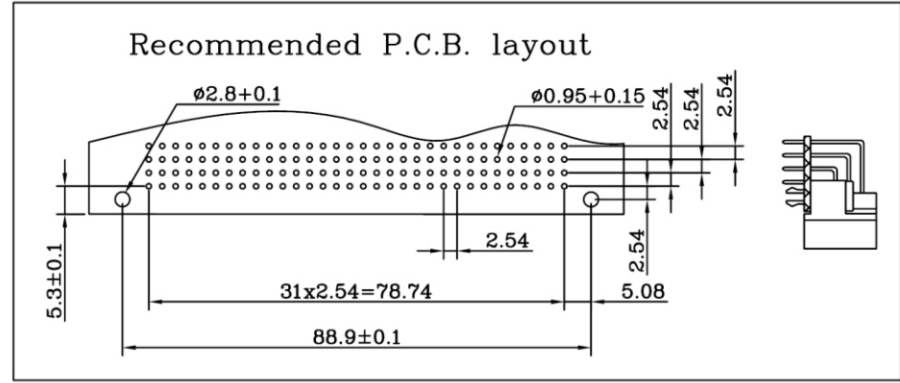

RoHS Compliant


TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
**煜倫股份有限公司**  
[www.morethanall.com](http://www.morethanall.com)

DRAWING BY CY		X, ± X, ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



#### ORDER INFORMATION

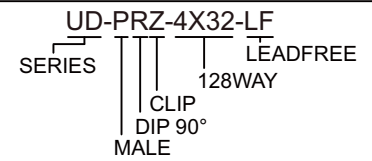

DESCRIPTION: