

P.C.B LAYOUT
Tolerance : ±0.05

Notes:

1. Current Rating : 5.6A
2. Contact Resistance : 20mΩ Max.
3. Insulator Resistance : 1000MΩ Min / 500V DC
4. Withstanding Voltage : 1000V AC for 1 Minute.
5. Operating Temperature : -55~+105°C

2	Contact	Brass	32
1	Housing	PBT, 94V-0	1
No.	Part Name	Specifications	Qt'y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.35

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.02


ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

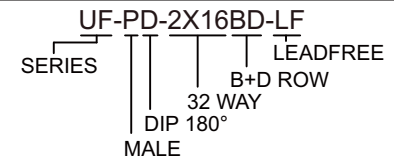

DESCRIPTION: DIN 41612, 32P, Male, Vertical

煜倫股份有限公司

www.morethanall.com