

**Material:**

Housing: 30% Glass filled PBT UL94V-0.  
 Contacts: Brass.

**Electrical Characteristics:**

Current Rating: 5.6AMP.  
 Dielectric Withstanding Voltage: AC1000V For 1 minute.  
 Insulator Resistance: 1000M $\Omega$  min. at DC 500V.  
 Contact Resistance: 30m $\Omega$  max. at DC 100mA.  
 Operating Temperature: -55°C ~ +105°C .

**\*RoHS Compliant**

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	48	z b d	2468
	32	z - d	2468
	16	z - -	2468


**RoHS Compliant**

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY		TOLERANCES ARE X, $\pm$ .X, $\pm$ .XX, $\pm$ .XXX, $\pm$ ANG, $\pm$
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



**ORDER INFORMATION**

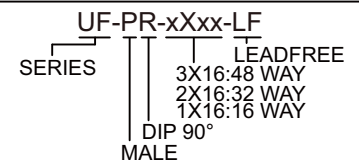

DESCRIPTION: