

SPECIFICATIONS

Material

Insulator: PBT, glass reinforced, rated UL 94V-0

Contact: Phosphor Bronze or Brass

Electrical

Current Rating: 2 Amp

Contact Resistance: 30 mΩ max.




Insulation Resistance: 3000 MΩ min.

Dielectric Withstanding Voltage: 500V AC for 1 minute

Operating Temperature: -40°C to +105°C

◆ **Mating Suggestion:** A39 series.

POSITION	A	B	C
2	9.7	7.7	2.5
3	12.2	10.2	5.0
4	14.7	12.7	7.5
5	17.2	15.2	10.0
6	19.7	17.7	12.5
7	22.2	20.2	15.0
8	24.7	20.2	17.5
9	27.2	25.2	20.0
10	29.7	27.7	22.5
11	32.2	30.2	25.0
12	34.7	32.7	27.5
13	37.2	35.2	30.0
14	39.7	37.7	32.5
15	42.2	40.2	35.0
16	44.7	42.7	37.5
17	47.2	45.2	40.0
18	49.7	47.7	42.5
19	52.2	50.2	45.0
20	54.7	52.7	47.5

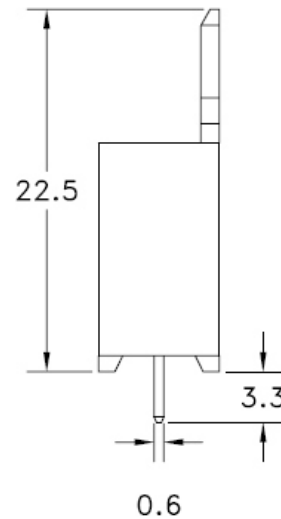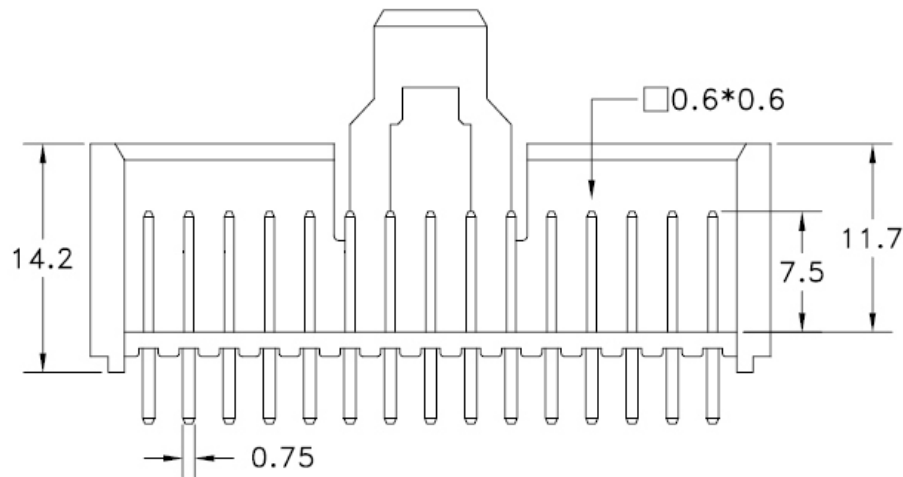

RECOMMENDED P.C.B LAYOUT

UF25-DL-xx-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **UF25-DL-xx**

DWG NO. **UF25-DL-xx**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司