
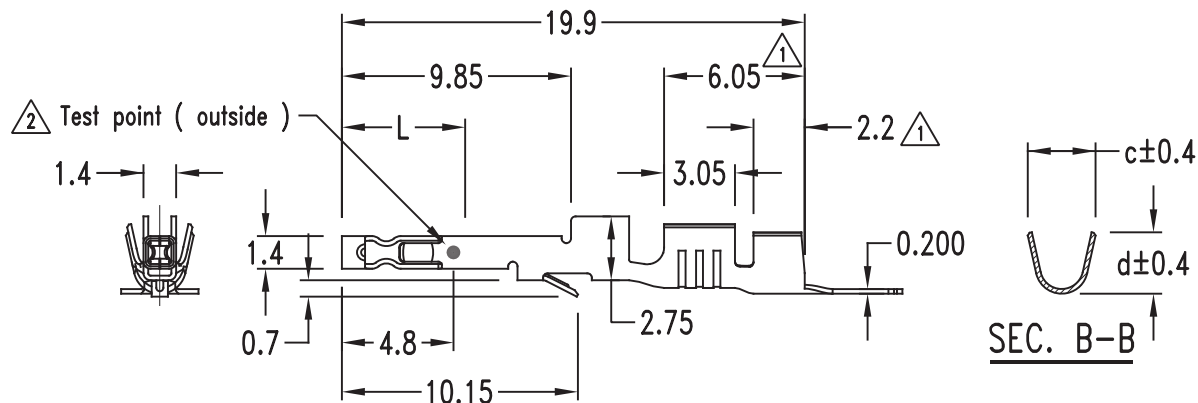


Features:

- Material: High conductivity copper alloy
- Wire range: #16 ~ #22 AWG


Specification:

- △₁ • Current rating: 14A at #16 AWG for 2 poles
8A at #16 AWG for other poles
- Voltage rating: 400V AC (RMS) or 400V DC Max.
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1800V AC/minute
- Ambient temperature range: -40°C ~ 105°C

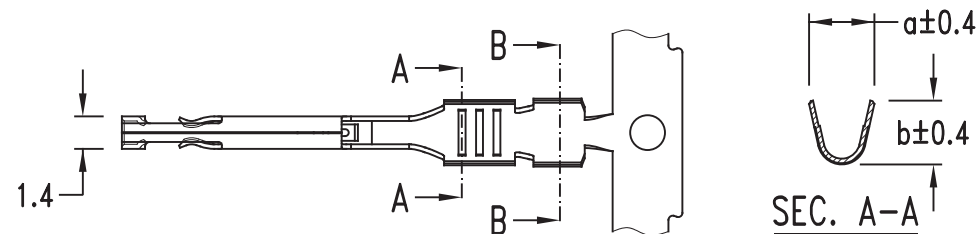

Ordering & Dimensional Information (mm)

Part No.	Wire range	Dim. a	Dim. b	Dim. c	Dim. d	Finished
UF35-FT-20	#20 ~ #22	2.18	2.18	2.33	2.08	Tin-plated 100u" over copper 50u" △ ₁
UF35-FT-16	#16 ~ #18	2.8	2.7	2.9	2.63	



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

UF35-FT-xx-LF
SERIES T LEADFREE
16:16~18 AWG
20:20~22 AWG
TERMINAL
FEMALE

DESCRIPTION: .138"(3.5mm) Crimp Terminal