

Features:

- 2 ~ 8 circuits available
- Housing Material: LCP UL94V-0 Black/Natural
- PIN Material: Brass, Tin-plated, SQ0.64

Specification:




- Current rating: 14A at 16AWG
- Voltage rating: 400V AC (RMS) or 400V DC Max.
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1800V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Ordering Information

Part No.	Feature	Color
UF35-PDPBK-1Xxx	With post, KEY A	Black
UF35-PDPWH-1Xxx	With post, KEY B	Natural

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
2	3.500	8.00
3	7.00	11.50
4	10.50	15.00
5	14.00	18.5
6	17.5	22.0
7	21.0	25.5
8	24.5	29.0

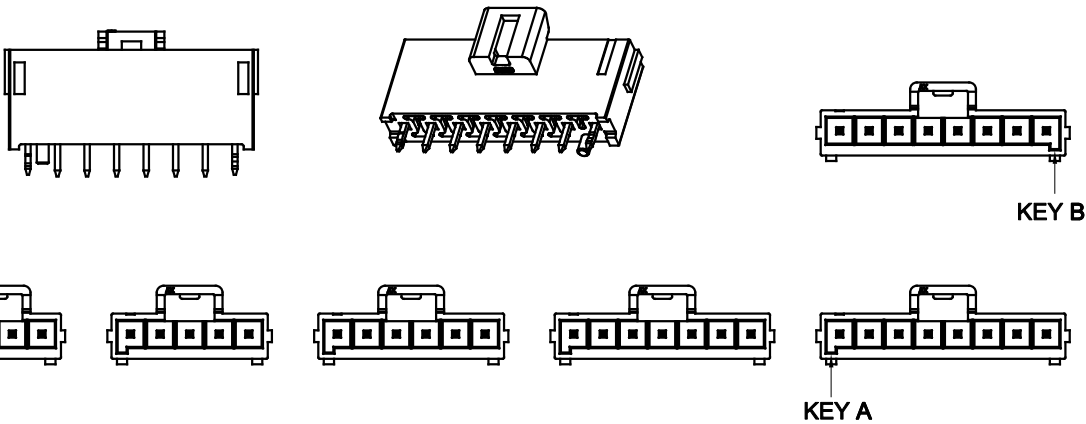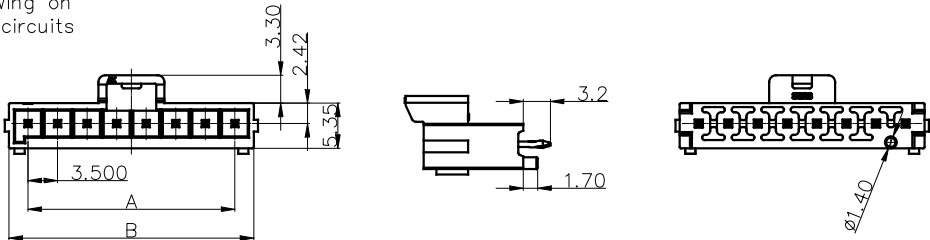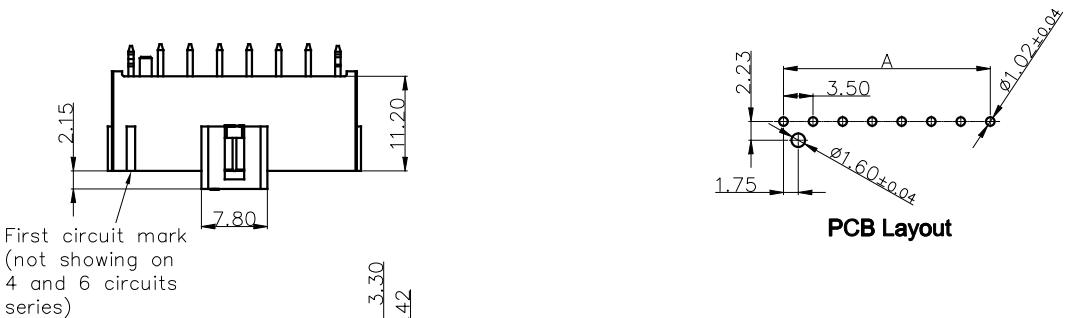

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG ± 1°

照片框

ORDER INFORMATION

UF35-PDPcc-1Xxx-LF

SERIES

MALE

DIP 180°

BK:BLACK

WH:WHITE

POST

LEADFREE

1X02:02 WAY

1X08:08 WAY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: .138" (3.5mm) Vertical Single Row Header