

Features:

- 1. 2~8 circuits available;
- 2. Material: LCP UL94V-0 Black/Natural;
- 3. PIN Material: Brass Tin-plated, SQ0.64;

Specification:





Current rating: 14A at 16A.
 Voltage rating: 400V AC(RMS) or 400V DC Max.
 Contact resistance: 10mΩ Max.
 Insulation resistance: 100MΩ Min.
 Withstanding voltage: 1800VAC/minute.
 Ambient temperature range: -40°C~105°C.

Ordering Information

Part No	Feature	Color
UF35-RPBK-1Xxx	With post KEY A	Black
UF35-RPWH-1Xxx	With post KEY B	Natural

Dimensional information(mm)

Circuits	DIM A	DIM B	DIM C
2	3.50	8.00	
3	7.00	11.50	
4	10.50	15.00	7.00
5	14.00	18.50	10.50
6	17.50	22.00	14.00
7	21.00	25.50	17.50
8	24.50	29.00	21.00

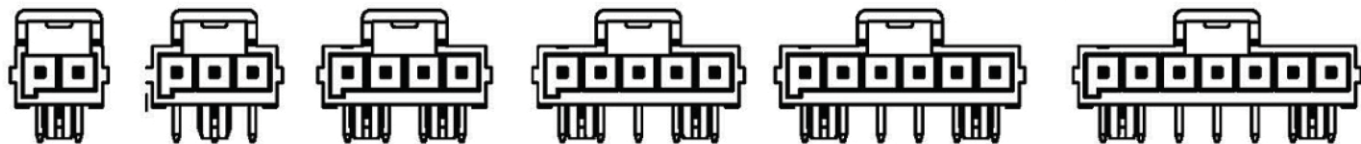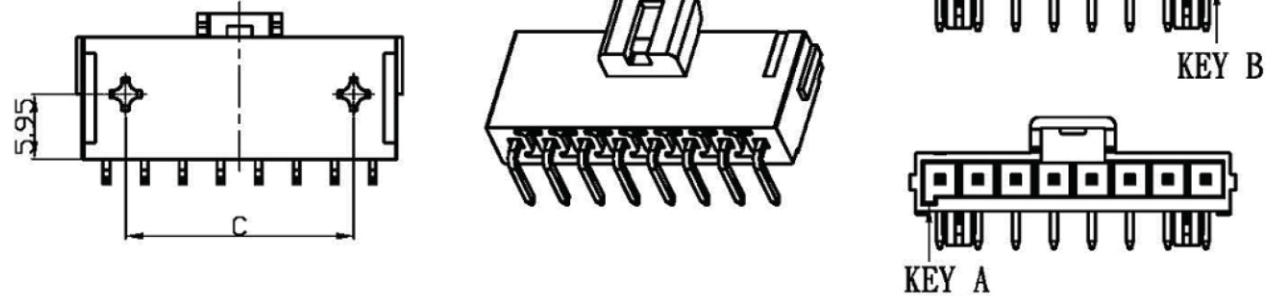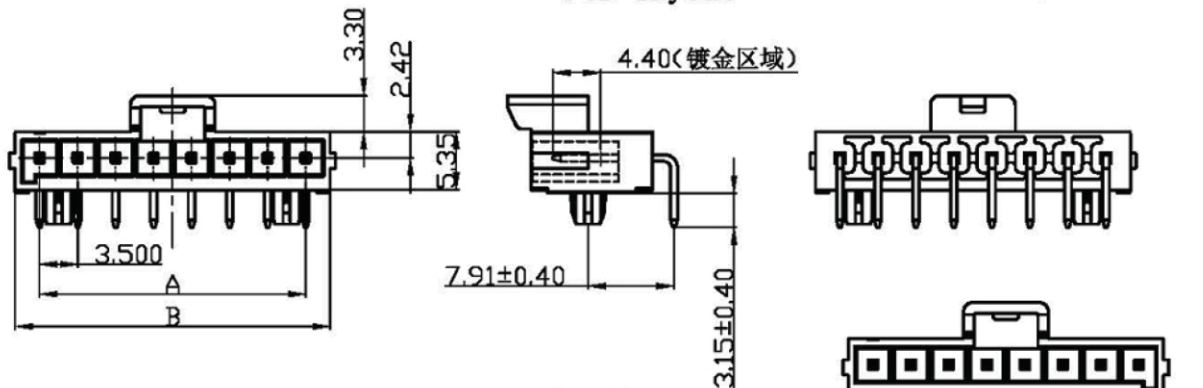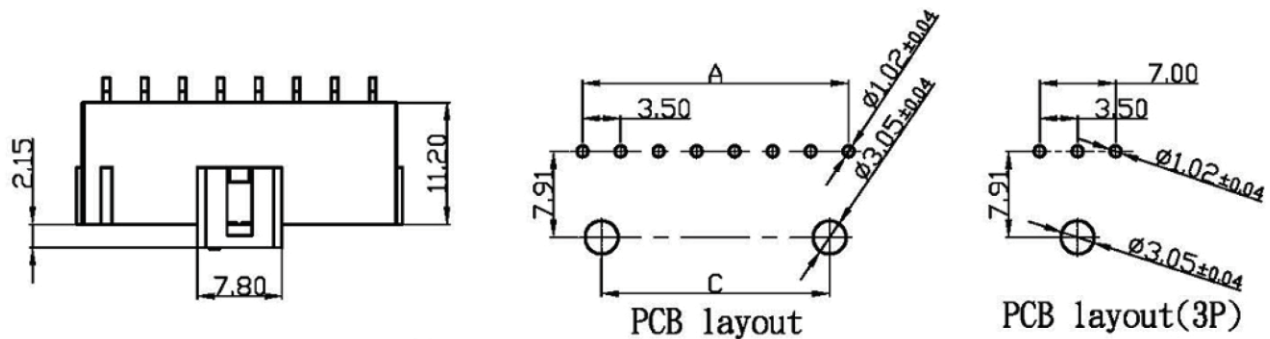

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±

照片框

ORDER INFORMATION

UF35-PRPcc-1Xxx-LF
 SERIES LEADFREE
 1X02:02WAY
 1X08:08WAY
 MALE BK:BLACK
 DIP 90° WH:NATURAL
 POST

DESCRIPTION:



煜倫股份有限公司

www.morethanall.com