


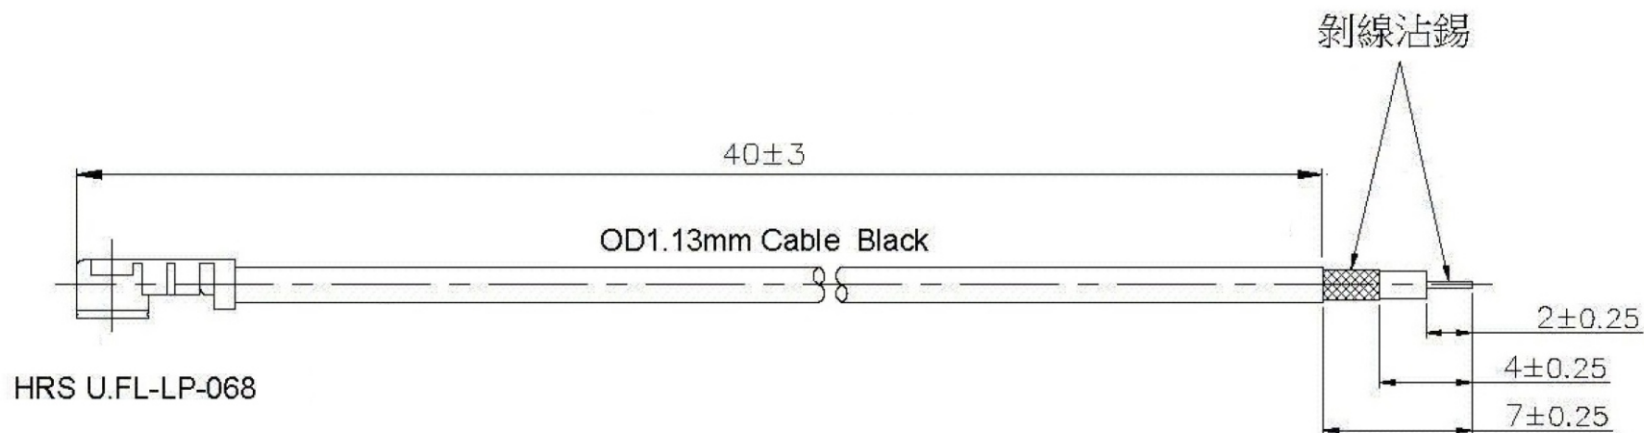

* 芯線與編織沾錫表面須完整，不可有破口現象。

NOTE:

- 1.IMPEDANCE: 50Ω
- 2.FREQUENCY RANGE: DC-6GHz
- 3.WORKING VOLTAGE:60Vrms MAX.
- 4.DIELECTRIC WITHSTANDING VOLTAGE:200Vrms MAX.
- 5.INSULATOR RESISTANCE:500M OHMS MIN.
- 6.100% CCD TEST
- 7.100% OPEN/SHORT TEST

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UFLX1-1R1X113-M4C-LF

SERIES

RT

LEADFREE

40mm

MALE

FOR Ø1.13mm CABLE

DESCRIPTION: U.FL PLUG TO TIN L=40mm FOR 1.13mm BLACK