


1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

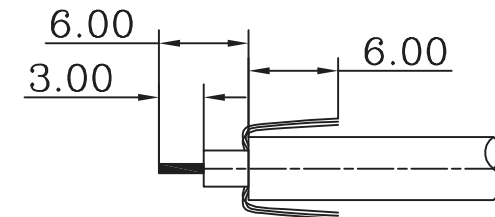

RECOMMENDED
CABLE STRIPPING DIM'S

4	REAR BODY	BRASS	1	NICKEL PLATED
3	CONTACT PIN	BRASS	1	NICKEL PLATED
2	INSULATOR	POM/BAKELITE	1	NATURAL
1	UHF BODY	ZINC	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE

0.5-15 = ±0.15
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00

ANGLES
±5°

照片框

ORDER INFORMATION

UHF-JCPQ-316-LF
SERIES | | | | LEADFREE
RG 316
SQUARE
PANEL
CRIMP
JACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

DESCRIPTION: UHF FEMALE CRIMP TYPE FOR RG316U CABLE