


Specifications:

- Current rating: 13A
- Voltage rating: 600V
- Ambient temperature range: $-55^{\circ}\text{C} \sim 105^{\circ}\text{C}$

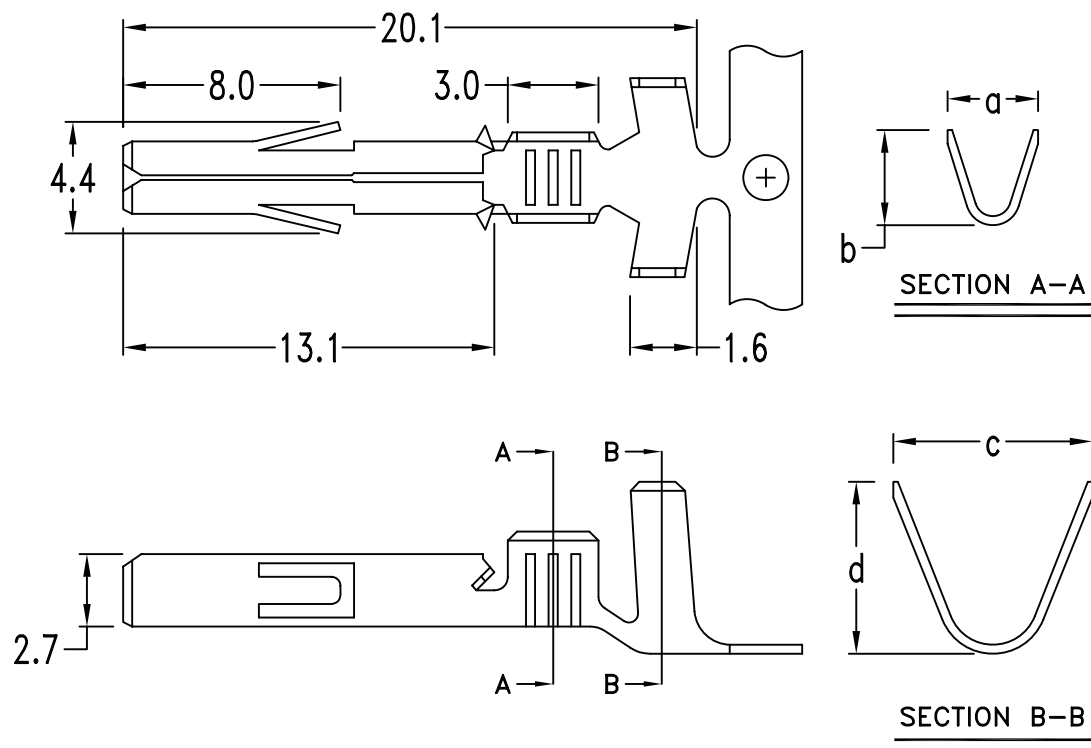

Ordering & Dimensional Information (mm)

Part No.	Dimension				Wire range	Material	Thickness	Finish
	a	b	c	d				
UL-F-18	2.4	2.4	3.4	3.4	#18 ~ #22	Brass	0.3mm	Tin-plated
UL-F-16	2.9	3.5	4.5 $\pm$ 0.4	4.4 $\pm$ 0.4	#16 ~ #20			
UL-F-12	2.9	3.5	6.4 $\pm$ 0.4	5.7 $\pm$ 0.4	#12 ~ #14			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

UL-F-xx-LF
SERIES | LEADFREE
12:12~14AWG
16:16~20AWG
18:18~22AWG
FEMALE TERMINAL

DESCRIPTION: