



Panel hole dimensions

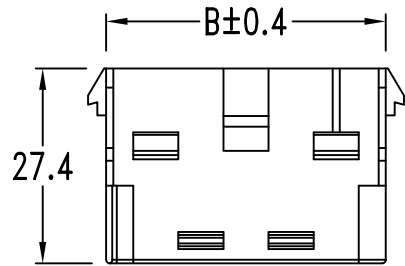

Specifications:

- Current rating: 11A
- Voltage rating: 600V
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature range: -55°C ~ 105°C

Features:

- 6 ~ 10 circuits available
- Integrally molded polarization
- Friction lock

Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G
6	31.75	39.37	39.80	3.90	4.80	13.50	3.20
7	38.10	45.72	46.15				
8	44.45	52.07	52.50				
9	50.80	58.42	58.85				
10	57.15	64.77	65.20				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

UL-P-1Xxx-LF
SERIES | LEADFREE
1X06:06 WAY
1X10:10 WAY
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: .250"(6.35mm) Single Row Power Connector