

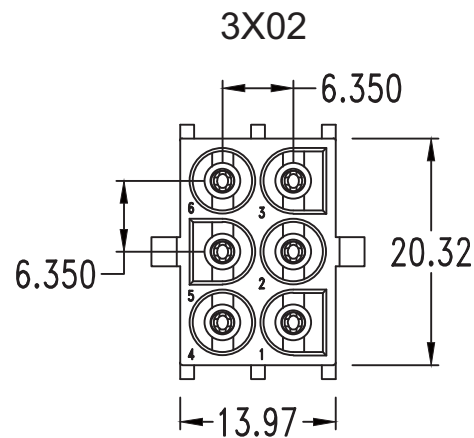
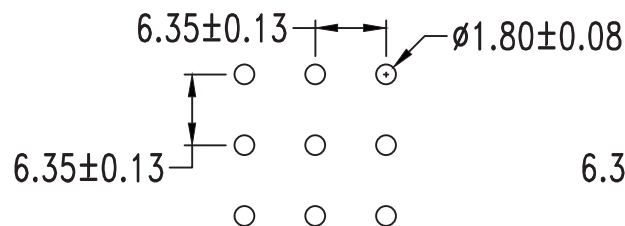
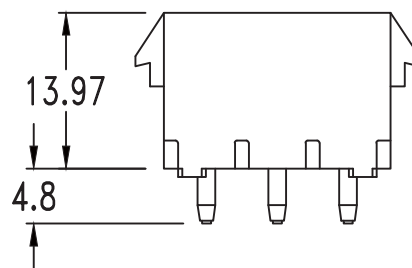
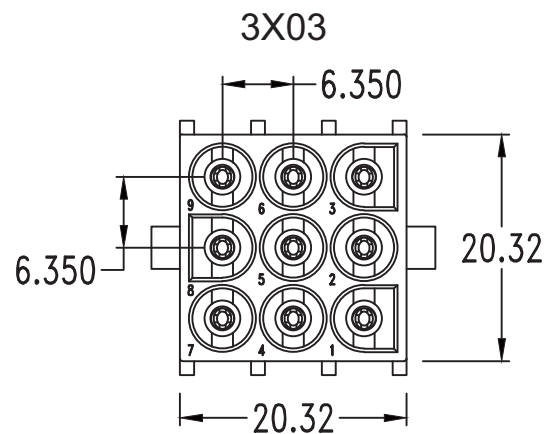
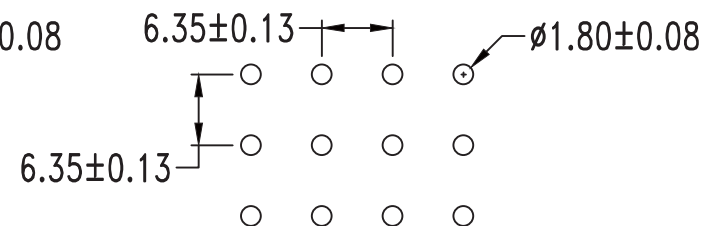


P. C. board layout

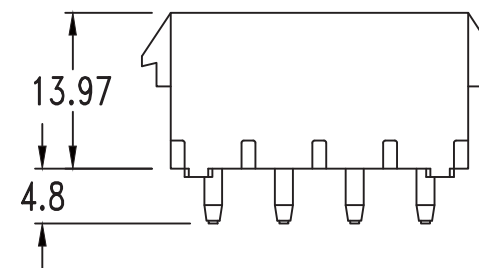

P. C. board layout

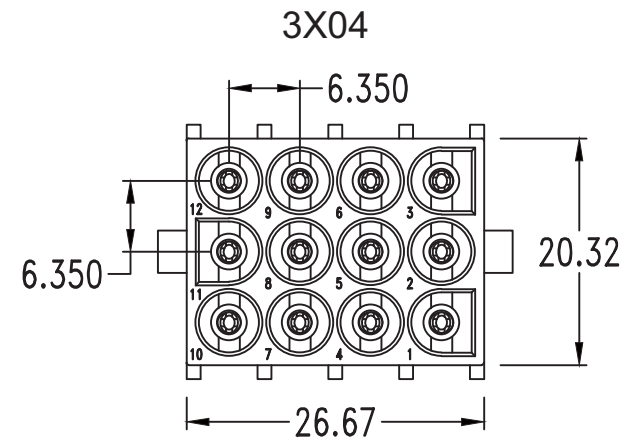

P. C. board layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UL-PDXxx-3Xxx-LF
SERIES
MALE HOUSING
DIP 180°
LEADFREE
3X02:06 WAY
3X05:15 WAY
BLANK:94V-2
V0:94V-0
NON POST

DESCRIPTION:

Features:



- 2 ~ 10, 12, 15 circuits available
- Pin Material: Tin-plated phosphor bronze or Gold Flash
- Standard Color: Nature

Specification:

- Current rating: 13A (2~4P), 11A (6~15P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

Ordering Information

Part No.	Insulation material	Feature
UL-PDX-3Xxx	UL 94V-2	Without Polarizing
UL-PDXV0-3Xxx	UL 94V-0	Without Polarizing

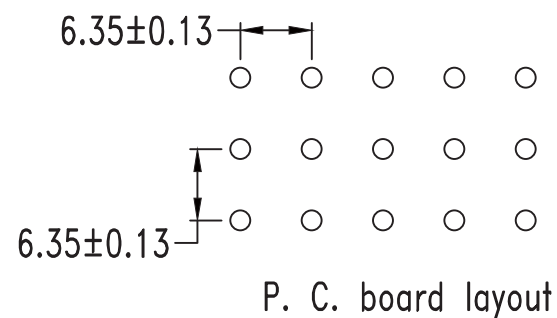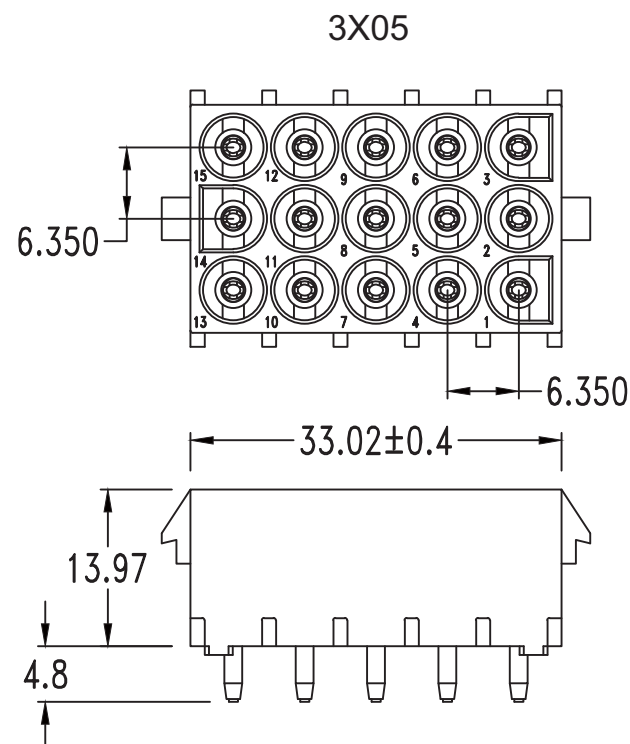

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UL-PDXxx-3Xxx-LF
SERIES
MALE HOUSING
DIP 180°
LEADFREE
3X02:06 WAY
3X05:15 WAY
BLANK:94V-2
V0:94V-0
NON POST

DESCRIPTION: