



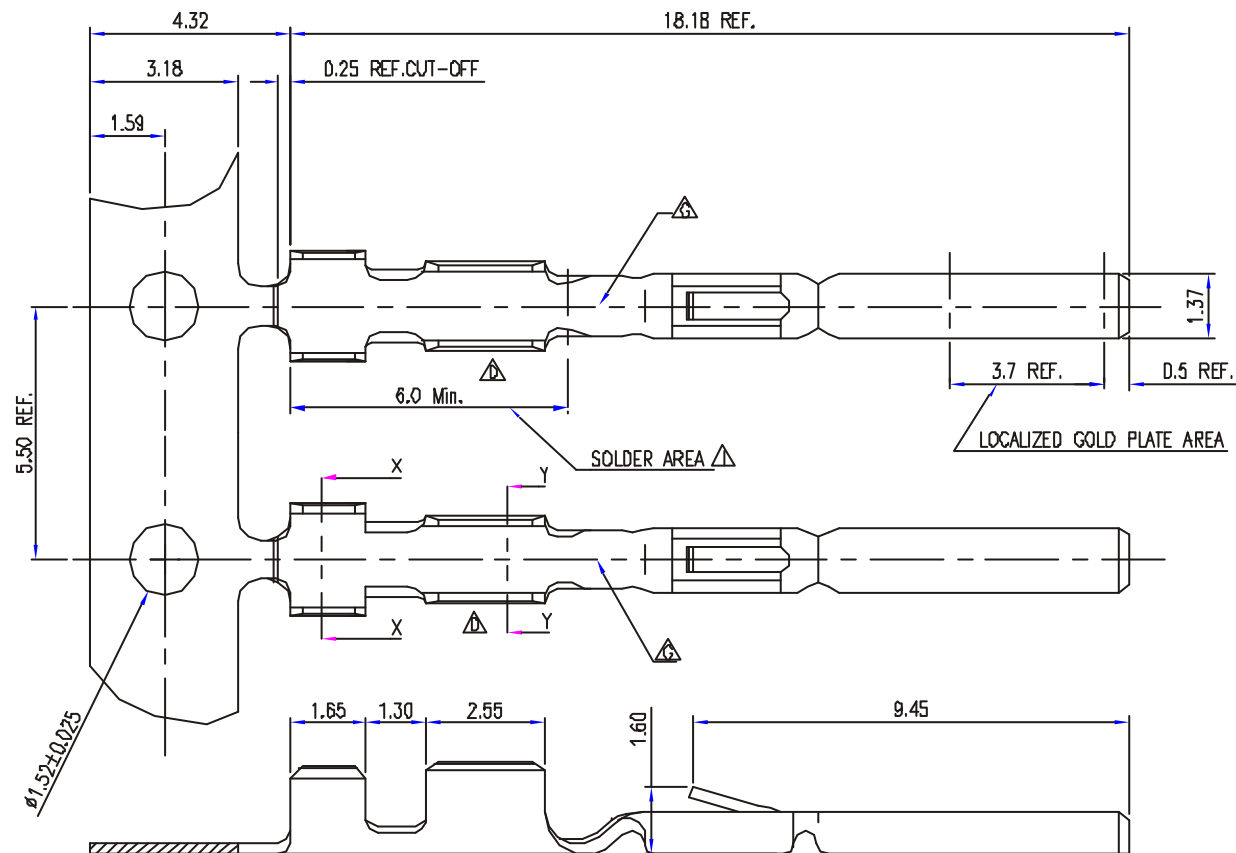

NOTES :

- 1.0. MATERIAL : COPPER ALLOY
- 2.0. FINISHES : SEE TABLE B:
- 3.0. PRODUCT NUMBER : REFER TO "TABLE B"
- 4.0. RECOMMENDED APPLICABLE WIRE SIZE : REFER TO "TABLE A"
- 5.0. PACKAGE : 10K pcs/Reel

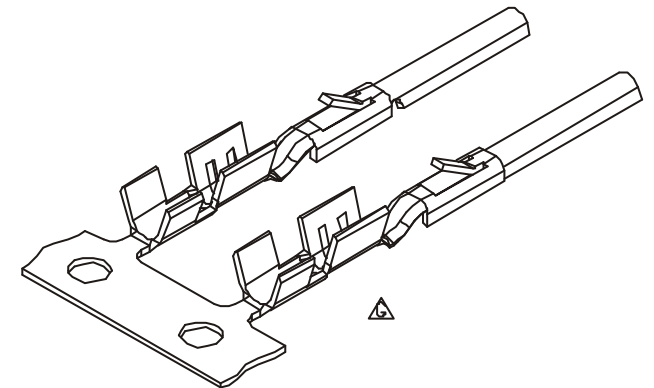

SCALE 5:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

USB-MT-xx-LF
SERIES LEADFREE
20:20-22 AWG
24:24 AWG
26:26-28 AWG
MALE TERMINAL

DESCRIPTION: PLUG CONTACT, CRIMP SNAP-IN TYPE

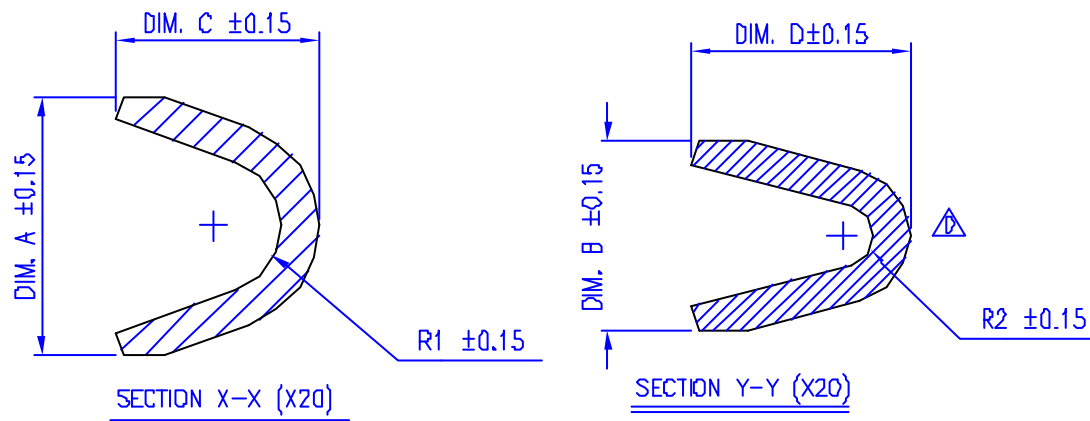


DIRECTION : TYPE D



DETAIL D(X10)

TABLE A:

TYPE OF CONTACT	WIRE RANGE	INSULATION RANGE	DIMENSION					
			DIM. A	DIM. B	DIM. C	DIM. D	R1	R2
USB-MT-24	24 AWG	$\phi 1.03-\phi 1.17$ mm	2.41	1.90	1.90	2.00	0.65	0.36
USB-MT-26	26-28 AWG	$\phi 0.79-\phi 1.05$ mm	1.72	1.27	1.35	1.45	0.45	0.20
USB-MT-20	20-22 AWG	$\phi 1.23-\phi 1.58$ mm	2.66	1.90	2.10	2.00	0.75	0.36

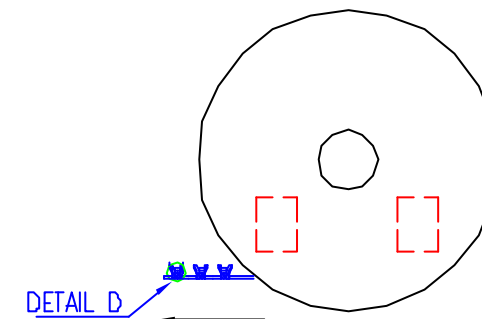

DETAIL D

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

USB-MT-xx-LF
SERIES | LEADFREE
20:20-22 AWG
24:24 AWG
26:26-28 AWG
MALE TERMINAL

DESCRIPTION: PLUG CONTACT, CRIMP SNAP-IN TYPE