


NOTES :

- 1.0. RATING :
- 1.1. VOLTAGE : 30 VAC (R.M.S.)
- 1.2. CURRENT : 1.0 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
- 1.3. TEMPERATURE : -55°C TO +85°C UNLESS LIMITED BY CABLE OR OVERMOLD (-40°C TO +80°C STORAGE ; +0°C TO +40°C OPERATING)
- 2.0. ELECTRIC CHARACTERISTIC :
- 2.1. CONTACT RESISTANCE : 30 MILLIOHMS MAXIMUM INITIAL
- 2.2. INSULATION RESISTANCE : 1,000 MEGOHMS MINIMUM
- 2.3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 3.0. MATERIALS : ABS RESIN, UL 94V-0 RATED
- 4.0. OTHERS :
- 4.1. ALL PART MUST BE PURCHASED SEPARATELY (REFER TO TABLE B)
- 4.2. PRODUCT NUMBERING CODE: REFER TO TABLE A

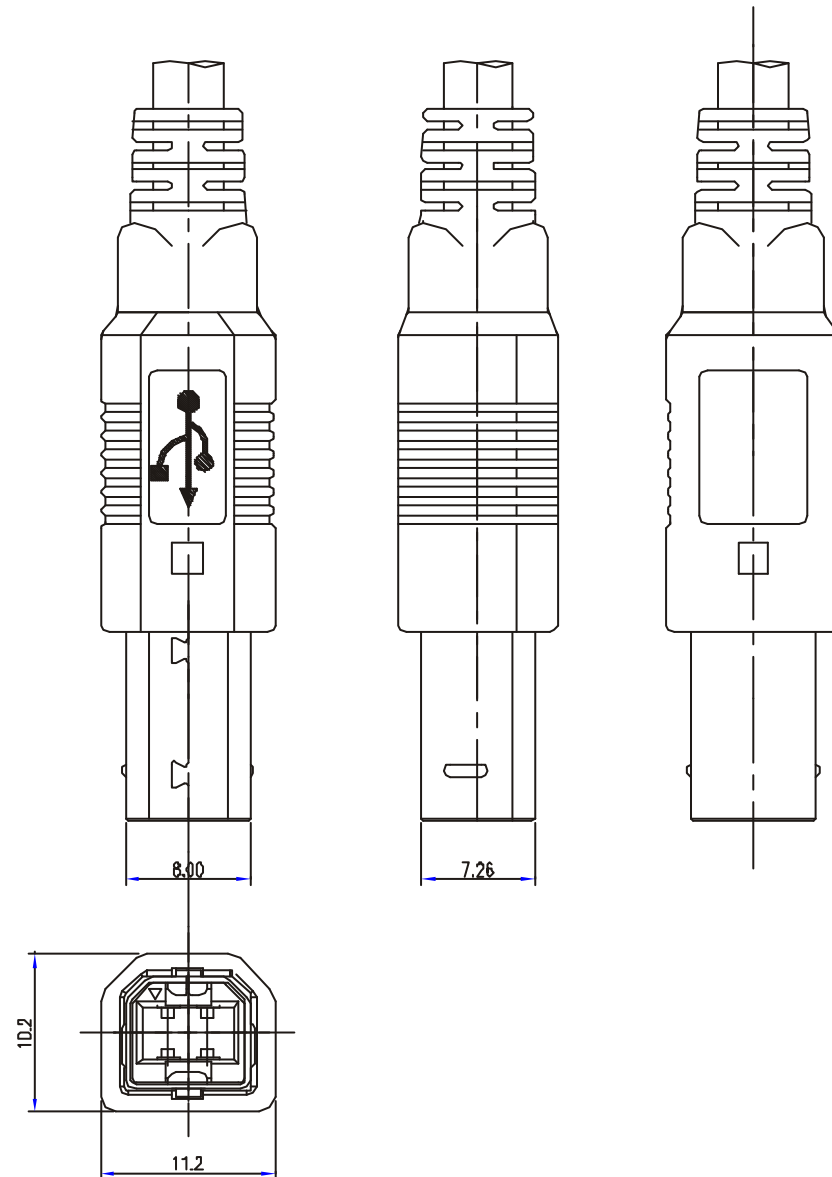

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-PA-4B-LF
SERIES T T LEADFREE
4 PIN B TYPE
ASSEMBLY
MALE

DESCRIPTION: USB B TYPE H000

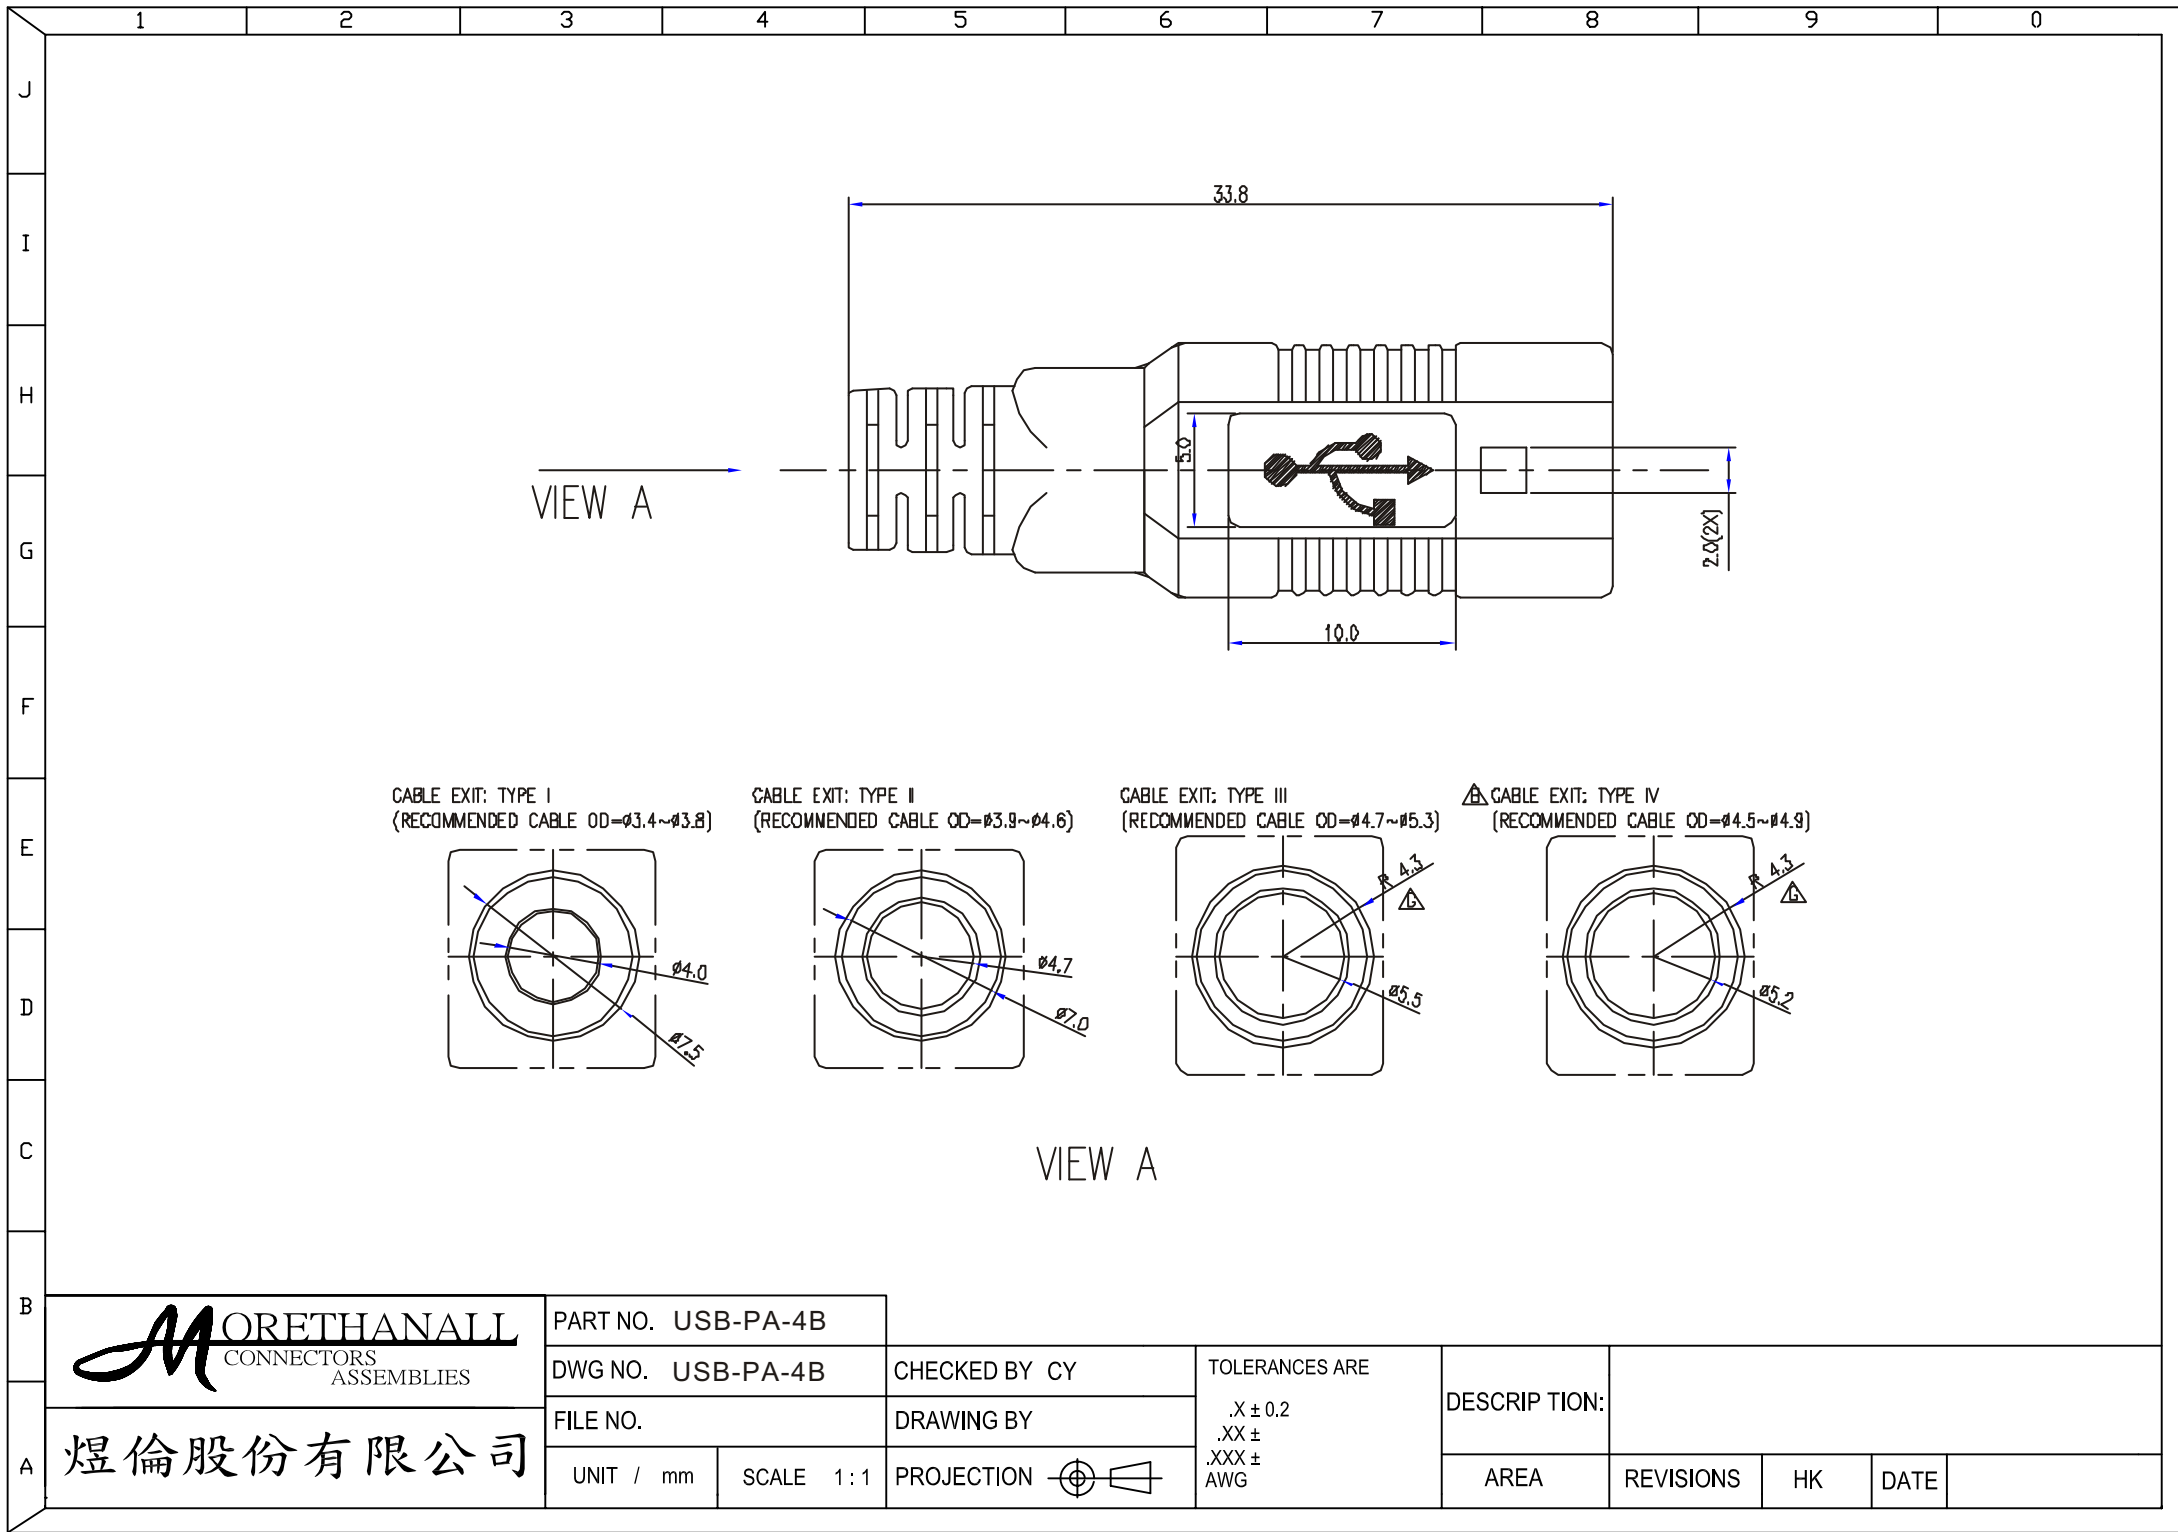

NOTES :

1.0. RATING :

1.1. VOLTAGE : 30 VAC (R.M.S.)

1.2. CURRENT : 1.5 AMPERE MINIMUM PER CONTACT AT 30°C T-RISE

1.3. TEMPERATURE : -55°C TO +85°C UNLESS LIMITED BY CABLE OR OVERMOLD (-40°C TO +60°C STORAGE ;+0°C TO +40°C OPERATING)

2.0. ELECTRIC CHARACTERISTIC :

2.1. CONTACT RESISTANCE : 30 MILLIOHMS MAXIMUM INITIAL

2.2. INSULATION RESISTANCE : 1,000 MEGOHMS MINIMUM

2.3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVER

2.4. CAPACITANCE : 2 PICOFARADS MAXIMUM AT 1KHZ

3.0. MATERIALS :

3.1. FRONT & BACK SHELL : STEEL

3.2. HOUSING : THERMOPLASTIC, GLASS FILLED, UL 94V-0 RATED

3.3. CONTACT : COPPER ALLOY

4.0. FINISHES :

4.1 FRONT & BACK SHELL:

△ BRIGHT TIN : 5.0um Min. BRIGHT TIN OVER 2.5um Min. COPPER

NICKEL: 3.0um-5.0um NICKEL OVER 2.5um Min. COPPER

GOLD: 1.9u"Min. GOLD ;5.0um Min. NICKLE; 2.5um Min. COPPER

4.2 CONTACT : SELECTIVE GOLD PLATING

5.0. OTHERS :


5.1. RECOMMENDED CABLE APPLICATION :

GUTTER DIAMETER APPLICABLE RANGE : #3.4mm TO #5.3mm

5.2. ALL PARTS PACKAGED UNASSEMBLED

5.3. PRODUCT NUMBERING CODE: REFER TO TABLE A

△ 6.0. MODIFICATION SEAM DIRECTION CIRCUMGYRATE:180 DEGREE.

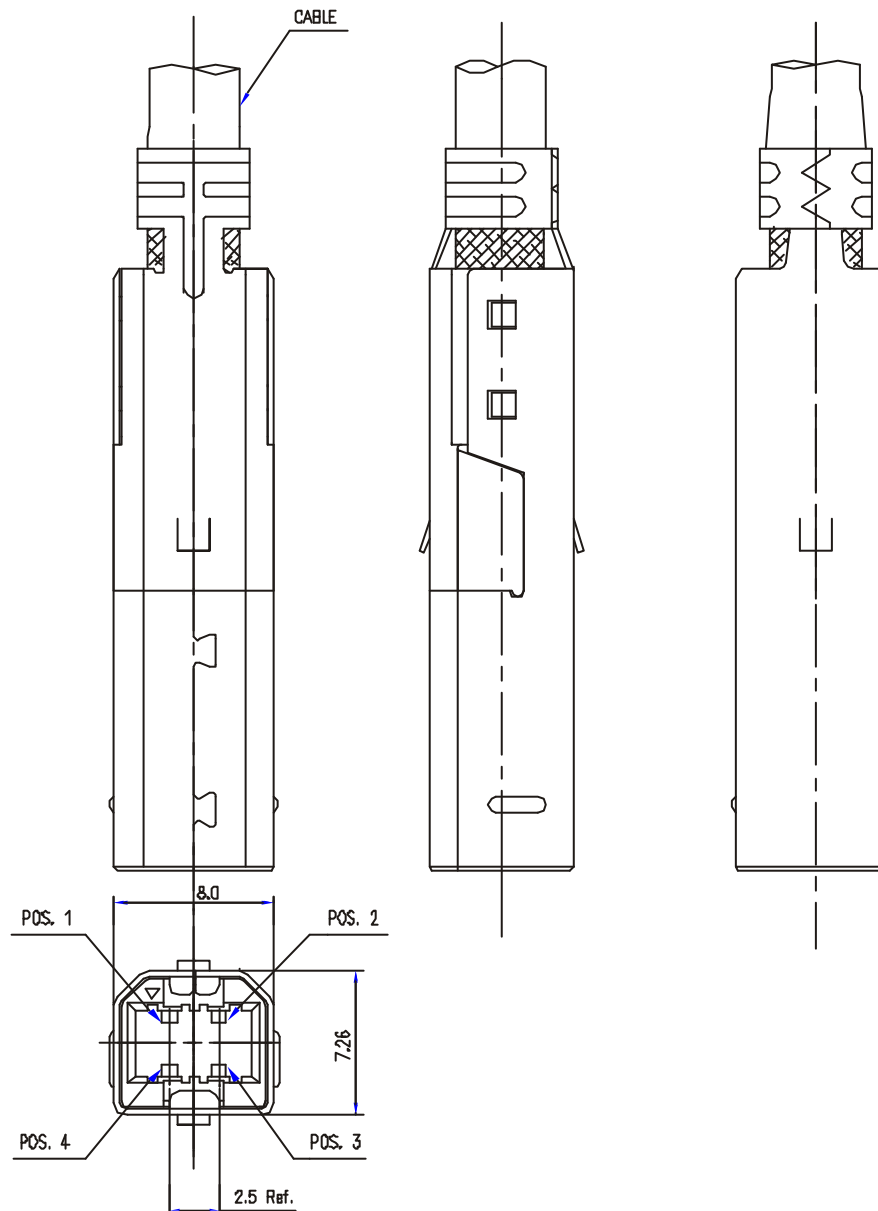

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. USB-PA-4B

DWG NO. USB-PA-4B

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

HARDWARE KITS,PLUG 4 POSITION,
SERIES B,SOLDER TYPE ,LONG CLAMP
[CUSTOMER DRAWING]

REVISIONS

HK

DATE

HARDWARE KITS,PLUC 4 POSITION,
SERIES B,SOLDER TYPE ,LONG CLAMP
[CUSTOMER DRAWING]