

項目	零件名稱	數量	材質	處理/備註
1	SHELL	1	STAINLESS	Ni: 50u"
2	Molding HOUSING	2	L.C.P	(Black)
3	GND SPRING	2	STAINLESS	Ni: 50u"
4	Insert molding 12PIN	2	L.C.P	(Black)
5	CONTACT	24	COPPER ALLOY	Contact area: gold flash, Solder tails: Tin100u", Ni: 50u"
6	PCB	1	--	--

; SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Operating temperature: -10°C ~ -60°C

Storage temperature: -20°C ~ + 5°C

ELECTRICAL

Insulator resistance: 100Mohms M Ω .

Withstanding voltage: 100 VAC / minute

Contact resistance: initial 40mohms Max;
after 50mohms Max.

MECHANICAL

Mating force: 5~20N

Unmating force : 8~20N

Durability: 5000 cycles Min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.25

.X ± 0.20

.XX ± 0.15


.XXX ± 0.10

ANG ±





PJECTION

照片框

ORDER INFORMATION

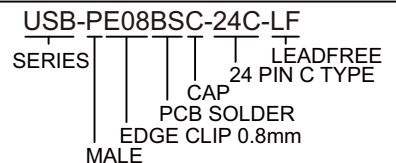

DESCRIPTION:

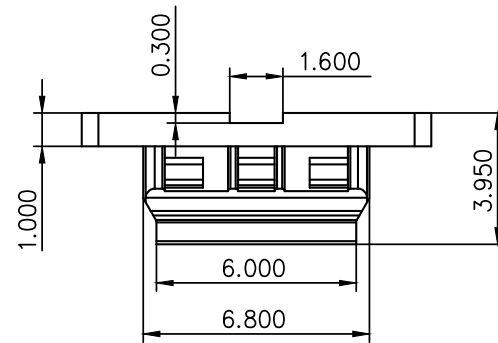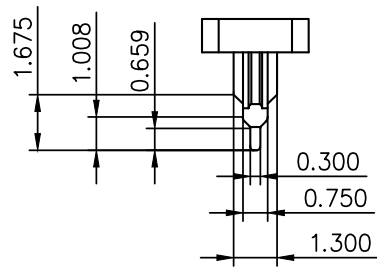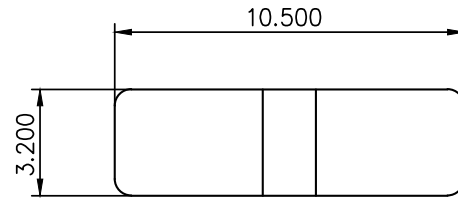

1. 產品規格:
膠芯材質: LCP UL94V-0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.25

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ±

照片框

ORDER INFORMATION

USB-PE08BSC-24C-LF
SERIES | | | | LEADFREE
CAP | 24 PIN C TYPE
PCB SOLDER
EDGE CLIP 0.8mm
MALE

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: