
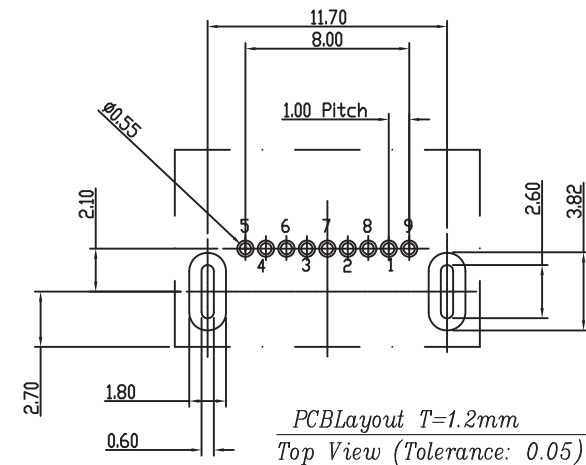
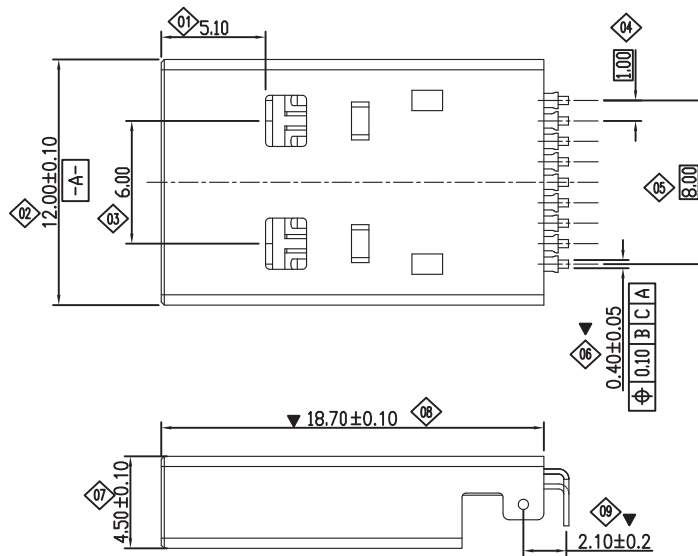


NOTE:

1.MATERIAL:

1.1 INSULATOR:LCP E130I UL 94V-0,Blue

1.2 CONTACT:BRONZE(T=0.25mm)/BRASS(T=0.25mm)
PLATED Ni50u",Sn80u"Au1~30u"

1.3 SHELL:SPCC(T=0.30mm),Ni PLATED

2.ELECTRICAL CHARACTERISTICS:

2.1 CONTACT RESISTANCE:30mΩ MAXIMUM

2.2 CONTACT CURRENT RATING:1.5AMPERES

2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.

2.4 INSULATION RESISTANCE 1000 MEGOHMS MIN

2.5 OPERATING TEMPERATURE:-40i°C ~ 85i°C

3 MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE:3.57kg MAX

3.2 UNMATED FORCE:1.02kg MIN INITIAL/0.82kg MIN

3.3 DURABILITY:MANDATORY:5,000 CYCLES

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-PR19BL-9A-LF



DESCRIPTION: USB 3.0 A M DIP 90°沉板式