
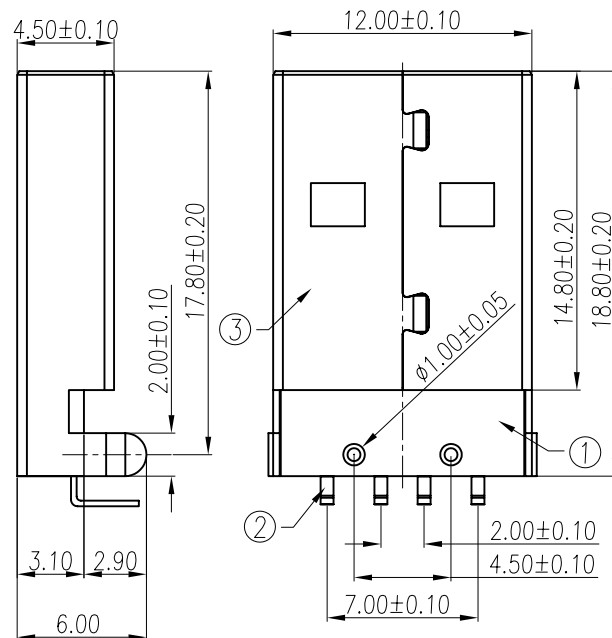


Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 30 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

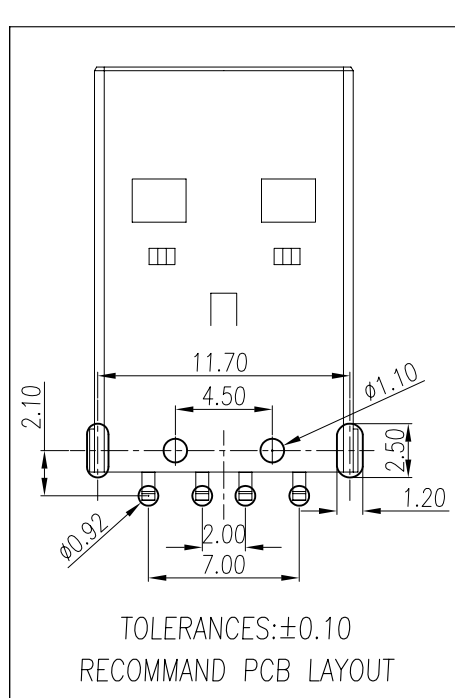

3	Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80~120u"Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
1	Housing	1	PBT	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

USB-PRBK-9A-LF
 SERIES | | | LEADFREE
 | | | 9 PIN A TYPE
 | BLACK
 | DIP 90°
 MALE

DESCRIPTION: USB-A(M) 90° DIP



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE _____

SIZE A4

PPOJECTION 

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±