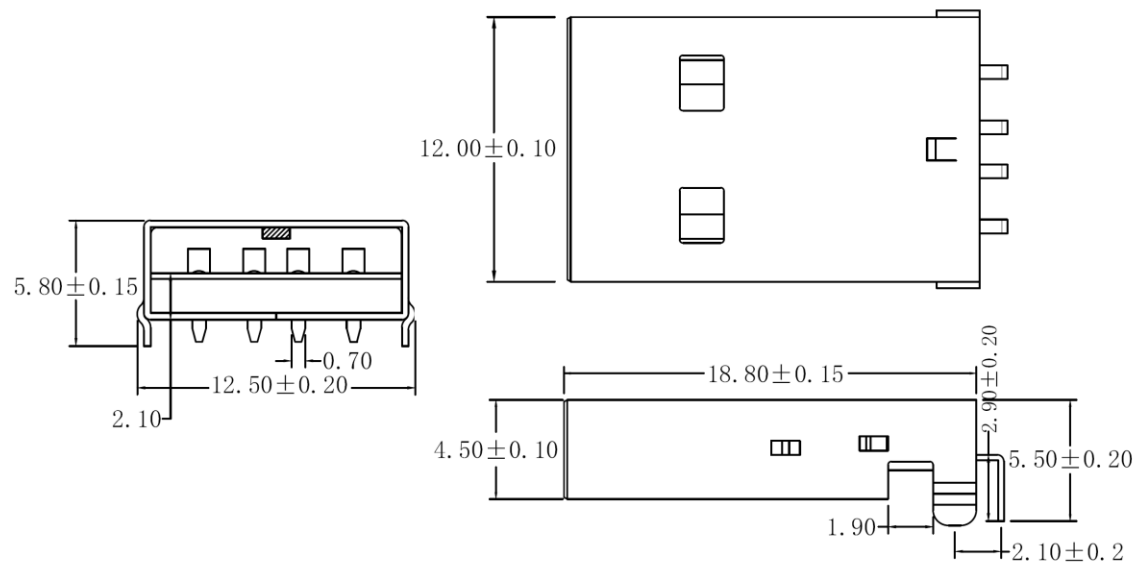


规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

原材料:Raw material:

1. 塑胶:Plastic cement:
Hing Temperature Thermoplastics,
LCP/PBT White/ Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: SPCC

电镀:Electroplate:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

ORDER INFORMATION

USB-PRK2621WH-4A-LF
SERIES
MALE
DIP 90°
KINK
2.10mm
2.6mm
WHITE
LEADFREE
4 PIN A TYPE

DESCRIPTION: