


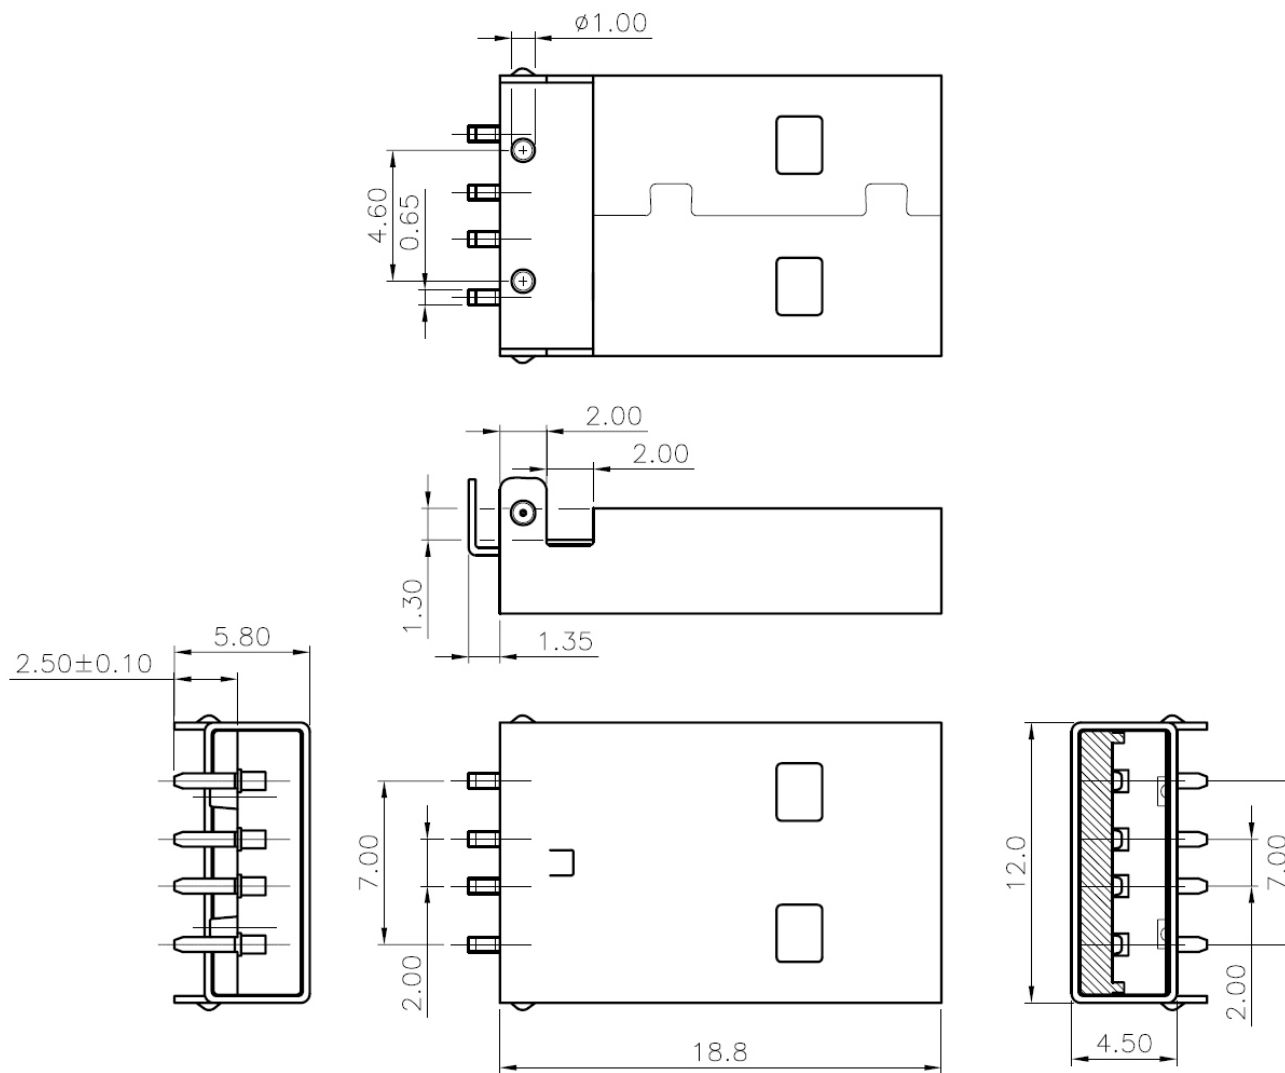

Specifications:

Current rating:1.0A AC,DC

Voltage rating:30V AC,DC

Contact resistance:20m ohm max

Insulation resistance:1,000M ohm min

Withstanding voltage:750V AC/minute

Temperature range:-40°C to +105°C

Materials:

Insulator:High Temp.Plastic(UL94V-0)

Contact:Copper Alloy


Plating:Selective Gold Plated

Shell:Spcc

Method Test:

Insertion Force rating:3.5kg Max

Withdrawal Force rating:1kg Min

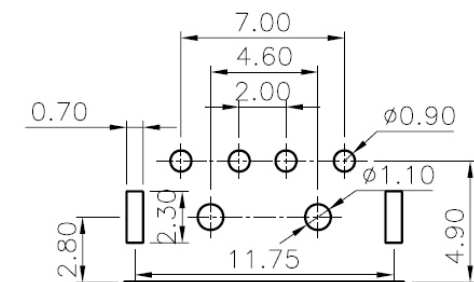

PCB LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

USB-PRRVBK-9A-LF

SERIES

LEADFREE

9 PIN A TYPE

BLACK

REVERSED

DIP 90°

MALE

DESCRIPTION: