
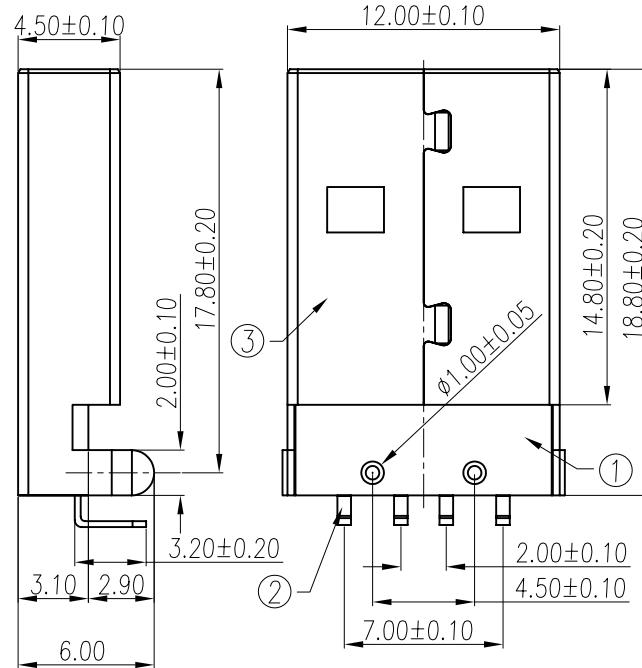


Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 30 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

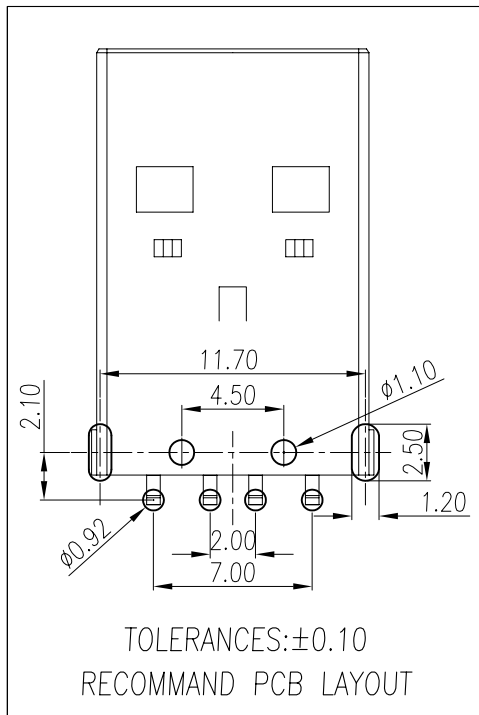

No.	Name	Q'ty	Material	Remarks&Thickness	Finish
3	Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"min Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area:0.8~30u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	PBT	UL 94-V0	Black/White

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

照片框

ORDER INFORMATION

USB-PRxx-4A-LF  
SERIES | | | LEADFREE  
MALE | | | 4 PIN A TYPE  
BK:BLACK  
WH:WHITE  
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: