


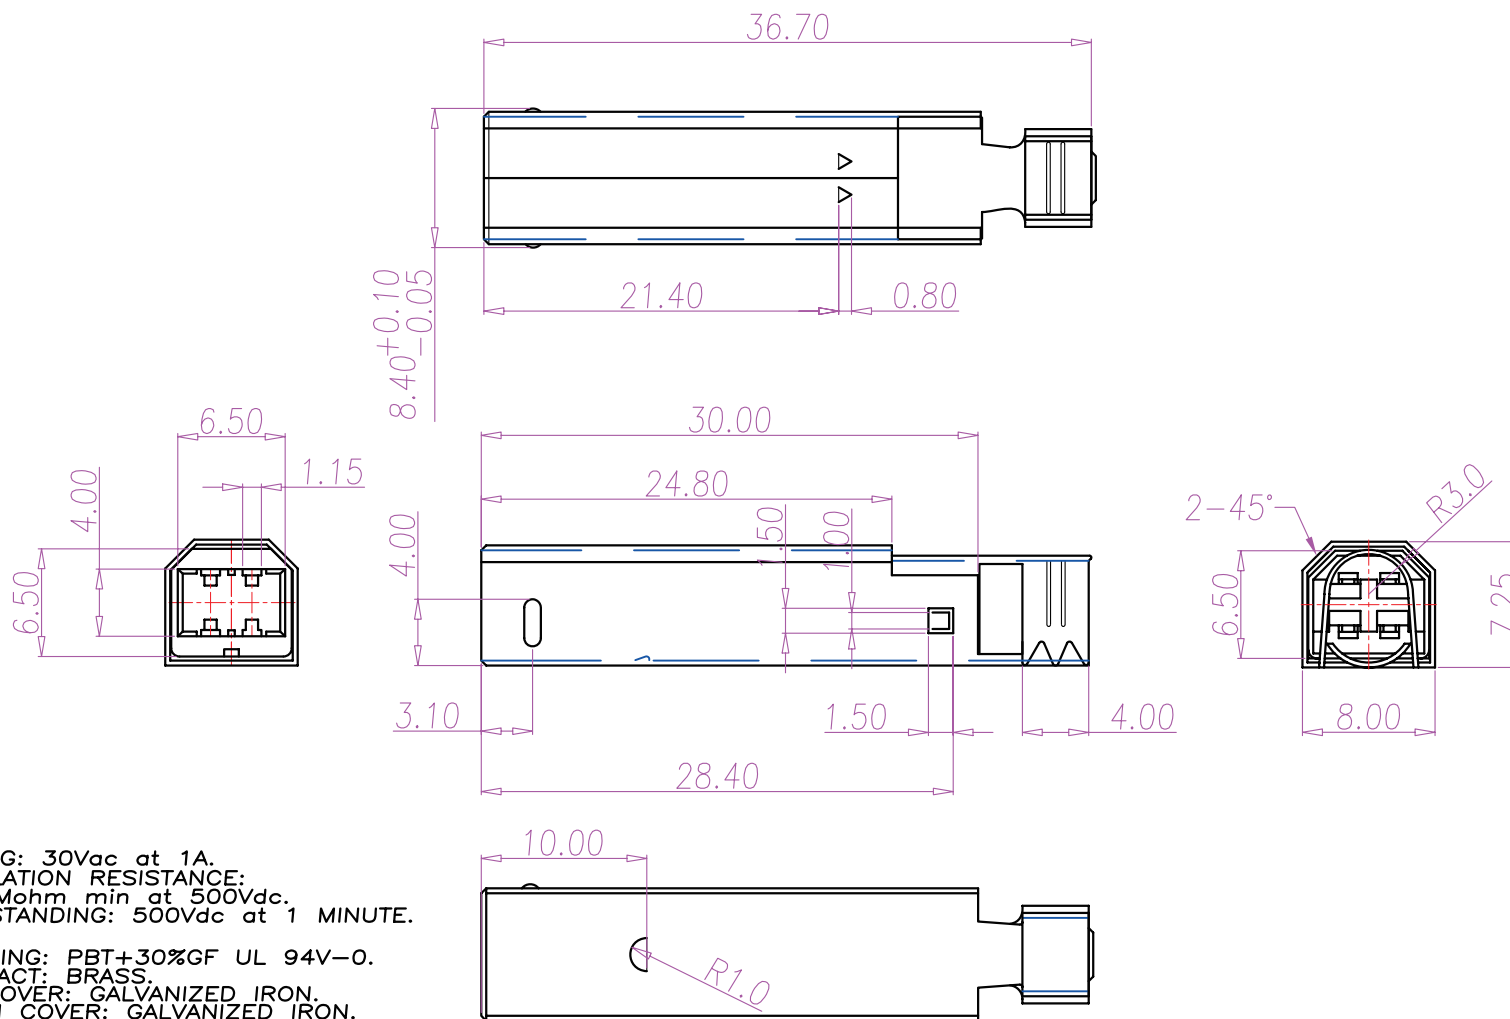

NOTE:

1.SAFETY:

- 1-1.RATING: 30Vac at 1A.
- 1-2.INSULATION RESISTANCE:
1000Mohm min at 500Vdc.
- 1-3.WITHSTANDING: 500Vdc at 1 MINUTE.

2.MATERIAL:

- 2-1.HOUSING: PBT+30%GF UL 94V-0.
- 2-2.CONTACT: BRASS.
- 2-3.UP COVER: GALVANIZED IRON.
- 2-4.DOWN COVER: GALVANIZED IRON.

3.MATERIAL:

- 3-1.CONTACT:SEE TABLE A.
- 3-2.UP/DOWN COVER: Nickel 50u".

TABLE A

USB-PSBKS30-4B	USB 4PIN (M) B TYPE 金30u"鍍層	BLACK
P/N	DESCRIPTION	HOUSING

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

USB-PSBKS30-4B-LF
SERIES | | | LEADFREE
B TYPE
4 WAY
SEMI GOLD 30u"
MALE | BLACK
SOLDER

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: USB 4PIN (M) B TYPE