

MATERIAL:


1.1 Insulator: P.B.T /UL 94V-0 Rated. Color Blue /White /Black.
1.2 Contact: Copper Alloy /t=0.20mm.
1.3 Shell: Cold Rolled /t=0.35mm Tin Plated.


SPECIFICATIONS:


2.1 Current Rating: 1 A Max.
2.2 Dielectric Withstanding Voltage: 500 V(ac) For 1 Min.
2.3 Contact Resistance: 30 mΩ Max.
2.4 Insulation Resistance: DC 500V下1000 MΩ Min.
2.5 Temperature Range:Ω -55°C ~ + 105°C.

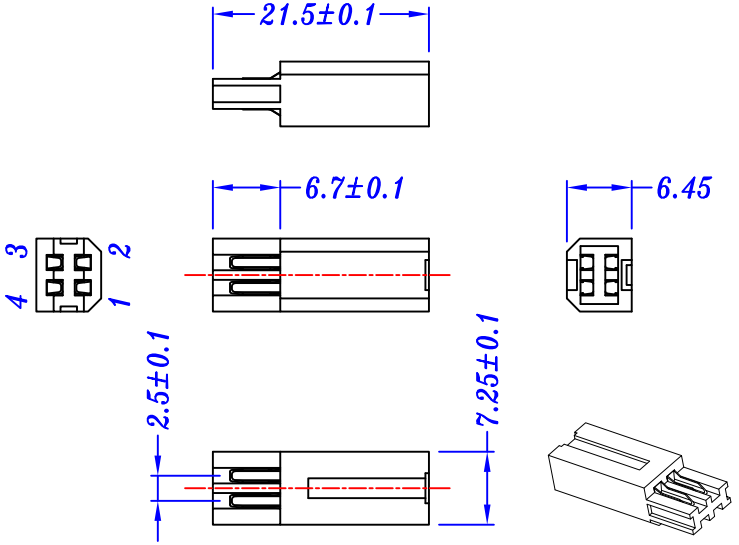


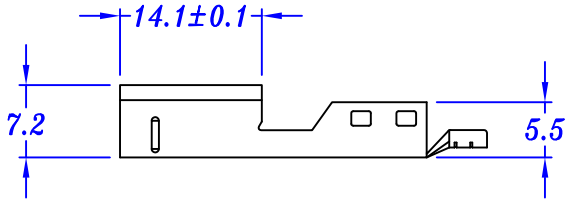


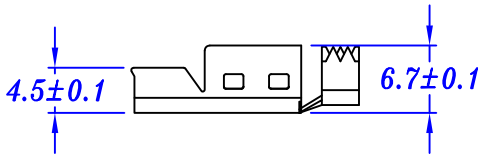


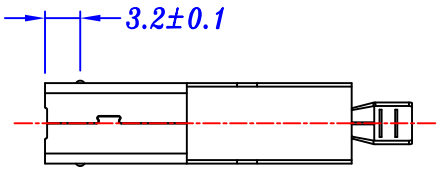










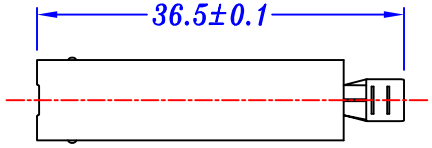







RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ±
UNIT / mm SCALE 1 : 1	.X ± 0.30
DATE	.XX ± 0.20
SIZE A4 PPOJECTION	.XXX ± 0.10
	ANG ±

照片框

ORDER INFORMATION

USB-PSxxS30-4B-LF

- SERIES
- MALE / SOLDER
- BK:BLACK / WH:WHITE / BL:BLUE
- SEMI GOLD 30u"
- 4 PIN B TYPE
- LEADFREE

DESCRIPTION: *SUB 2.0-B TYPE Solder (Male)*三件式