
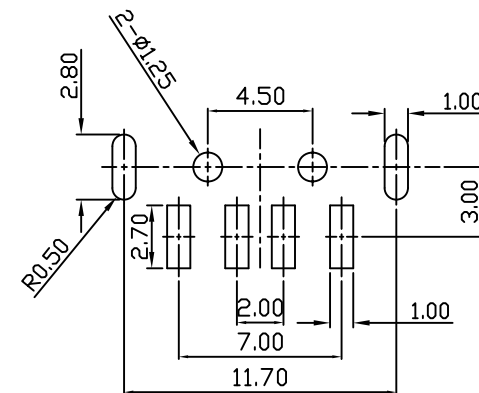
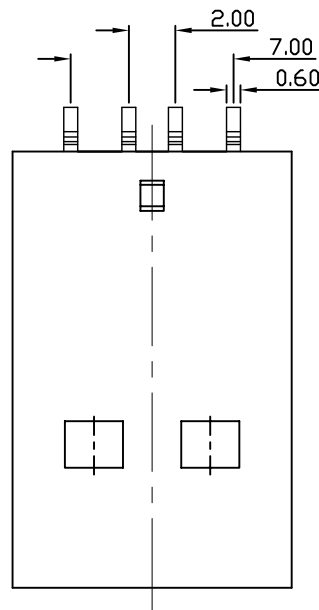
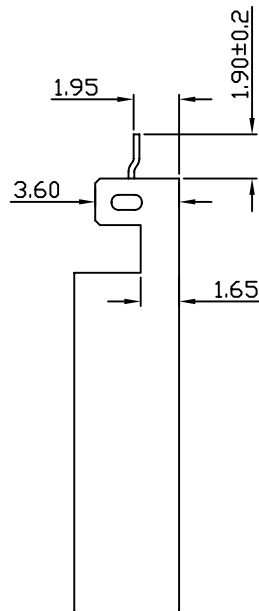


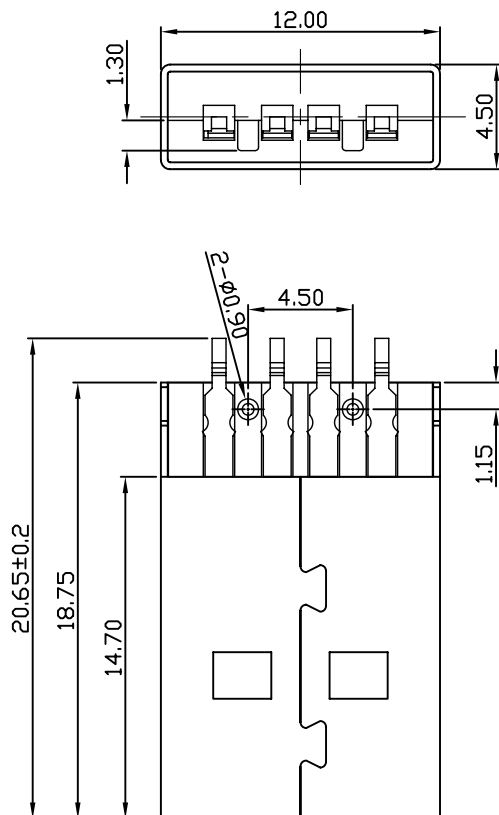

P.C.B LAYOUT

Specification:

1. Current rating:1A Max
2. Dielectric withstanding voltage:500 V (ac) for 1 minute
3. Contact resistance:30m Ω Max
4. Insulation resistance:1000m Ω Min at DC 500V
5. Temperature range:55°C-240°C

BOM:

3	USB 2.0-A公頭(SMT)-沉板式PIN	Brass T=0.25±0.03MM	Gold flashed/TIN	✓
2	USB 2.0-A公頭(SMT)-沉板式膠心	LCP, UL 94 V-0.	黑色	✓
1	USB 2.0-A公頭(SMT)-沉板式外殼	SPCC, T=0.30±0.03MM	鍍鎳	✓
項次	品名	材料	電鍍或顏色	備注

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-PW1936BKS30-4A-LF
SERIES MALE 90°SMT
LEADFREE 4 PIN A TYPE
SEMI GOLD 30u"
3.6mm
1.95mm

DESCRIPTION: 公頭(SMT)-沉板式