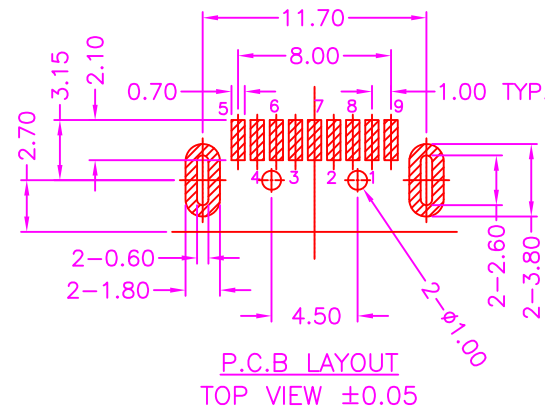
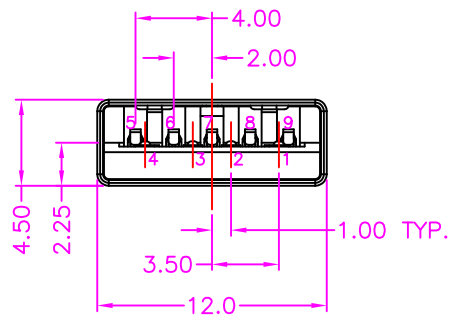
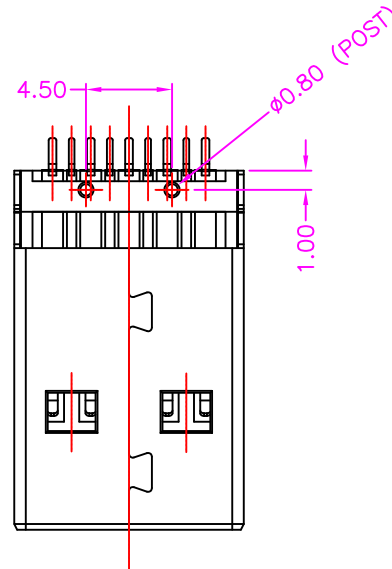
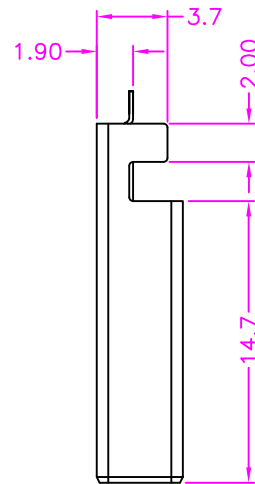
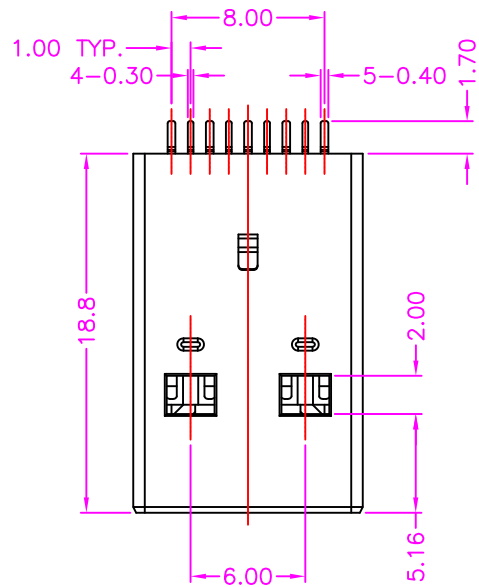


Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLUE

SHELL: SPCC, NICKEL PLATING

TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

照片框

ORDER INFORMATION

USB-PW19MP1BL-9A-LF
SERIES | T | T | T | LEADFREE
MALE | 1.9mm | BLUE | 9 PIN A TYPE
90° SMT | METAL FOOT+POST

DESCRIPTION: USB 3.0 A TYPE, PCB MID MOUNT, SMT, METAL SHIELD, MALE