


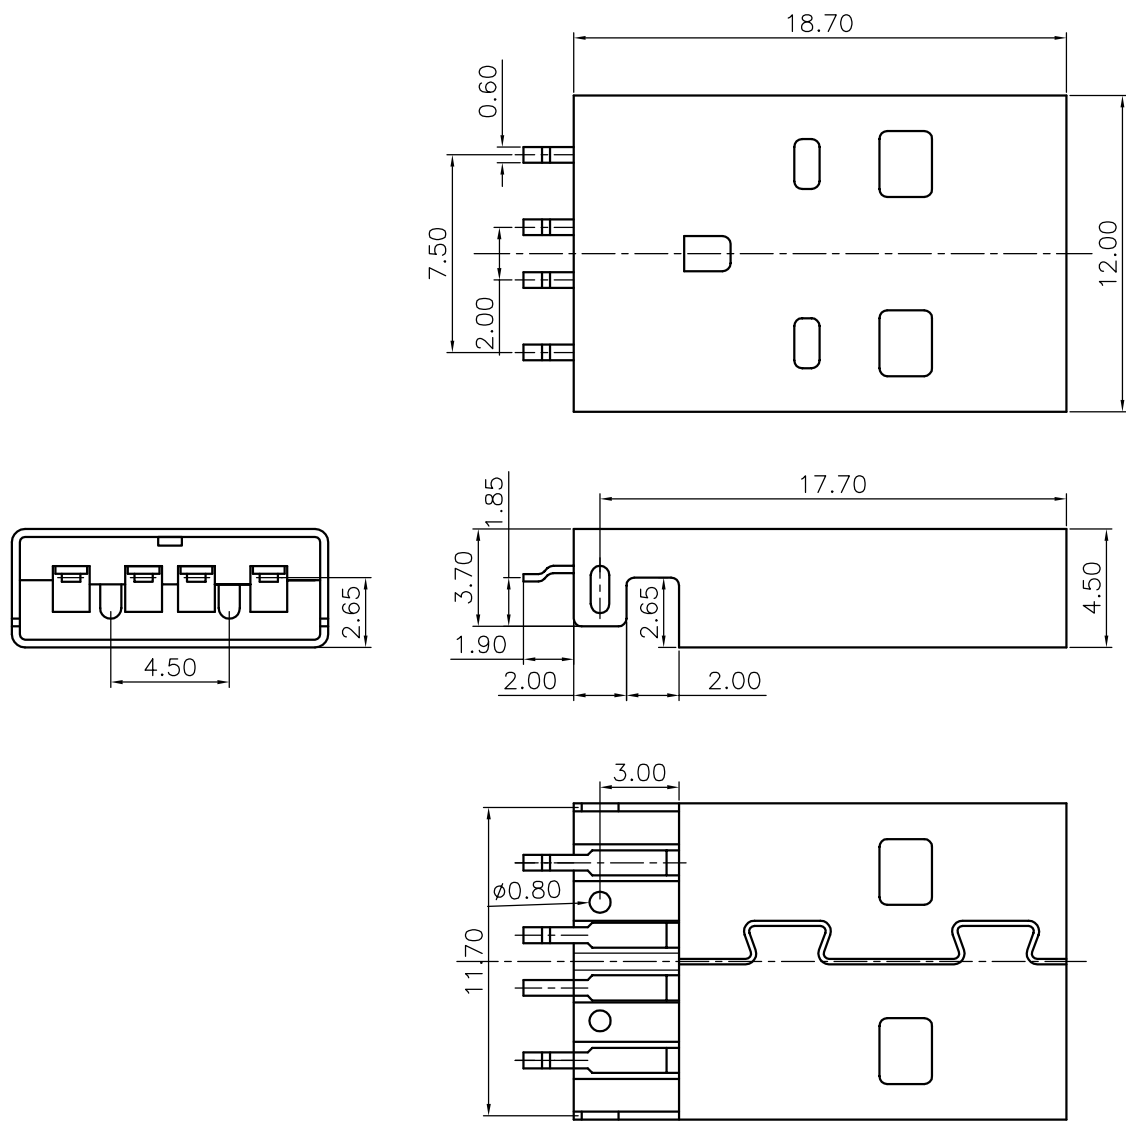


Specifications:

Current Rating: 1.0A AC,DC
 Voltage Rating: 500V AC,DC
 Contact Resistance: 30m Ohm Max
 Insulation Resistance:1000M Ohm Min
 Withstanding Voltage: 750V AC/Minute
 Temperature Range:-55°C To +85°C

Materials:

Contact: Copper Alloy
 Insulator:LCP UL 94V-0
 Contact:Gold Plating
 Shell:Nickel falsh
 Method Test:

Insertion force rating:1.0~2.0kg/pc
 Withdrawal force rating:0.8~2.0kg/pc

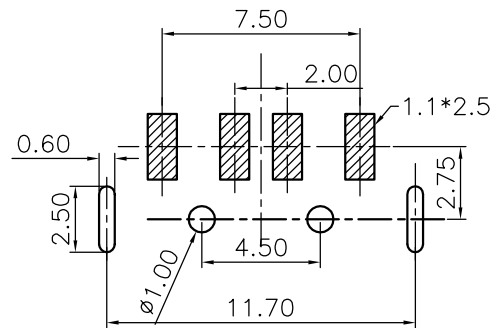

THICKNESS:0.8~1.2mm
 PCB LAYOUT

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-PW275-4A-LF

SERIES

LEADFREE

4 PIN A TYPE

2.75mm

90°SMT

MALE

DESCRIPTION: