


Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:30V AC,DC
 Contact resistance:20mΩ max
 Insulation resistance:1,000MΩ min
 Withstanding voltage:750V AC/minute
 Temperature range:-40°C to +105°C
 Materials:

Insulator:High Temperature material(UL 94V-0)
 Contact:Copper Alloy
 Plating:Gold Plated 30u"
 Shell:Metal Iron with Nickel plated
 Method Test:

Insertion force rating:1.0~2.0kg/pc
 Withdrawal force rating:0.8~2.0kg/pc

RoHS Compliant

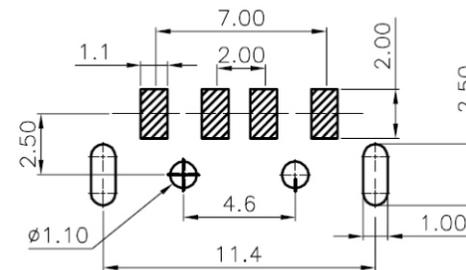

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USB-PW275BKS30-4A-LF
 SERIES | LEADFREE
 4 PIN A TYPE
 SEMI GOLD 30u"
 BLKCA
 90°SMT
 MALE

DESCRIPTION:

www.morethanall.com