

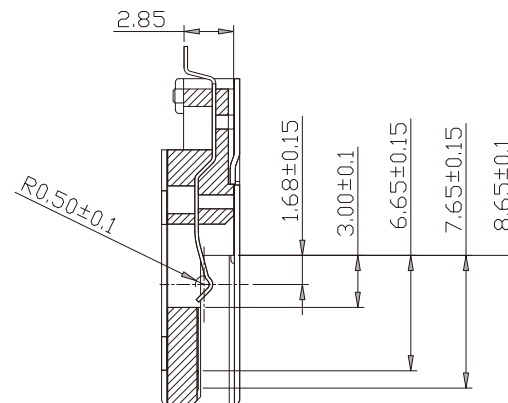
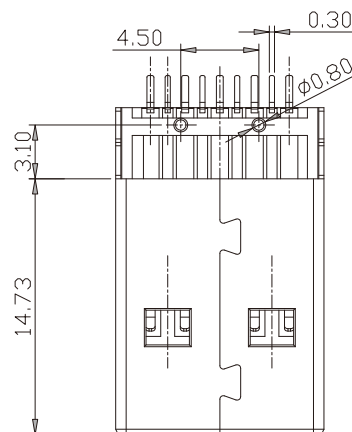
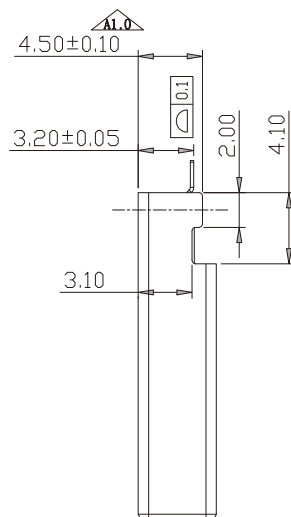
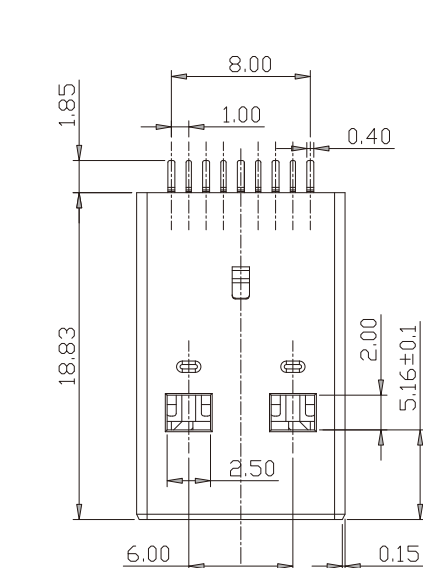



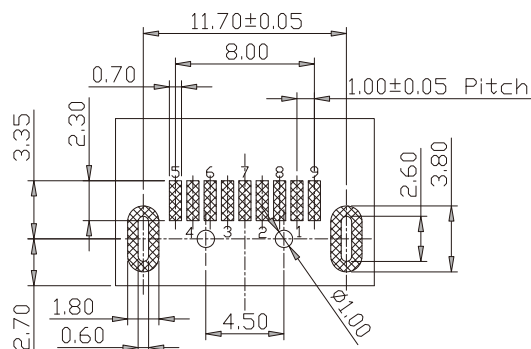

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield



RECOMMENDED PCB LAYOUT

NOTES:

- MATERIAL:
 - HOUSING: LCP UL94V-0
 - CONTACT: BRASS C2680-H(T=0.20mm)
 - SHELL: SPCC(T=0.30mm)
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAXIMUM
 - CONTACT CURRENT RATING: 1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 - OPERATING TEMPERATURE: -40°C~85°C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 3.57kg MAX.
 - UNMATED FORCE: 1.02kg MIN.
 - DURABILITY: MANDATORY: 5000 CYCLES
- PLATING:
 - TERMINAL: GOLD FLASH ALL OVER 50U" MIN. NICKEL AND 1U" MIN. TIN ALL OVER 50U" MIN. NICKEL ON SOLDER AREA.
 - SHELL: 150U" MIN NICKEL PLATING OVERALL.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ±
X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-PW32MP1xx-9A-LF
SERIES | LEADFREE
9 PIN A TYPE
BL: BLUE
BK: BLKCA
METAL FOOT+POST
MALE
90°SMT
3.2mm

DESCRIPTION: USB3.0 A TYPE PLUG SMT (H=3.2)