


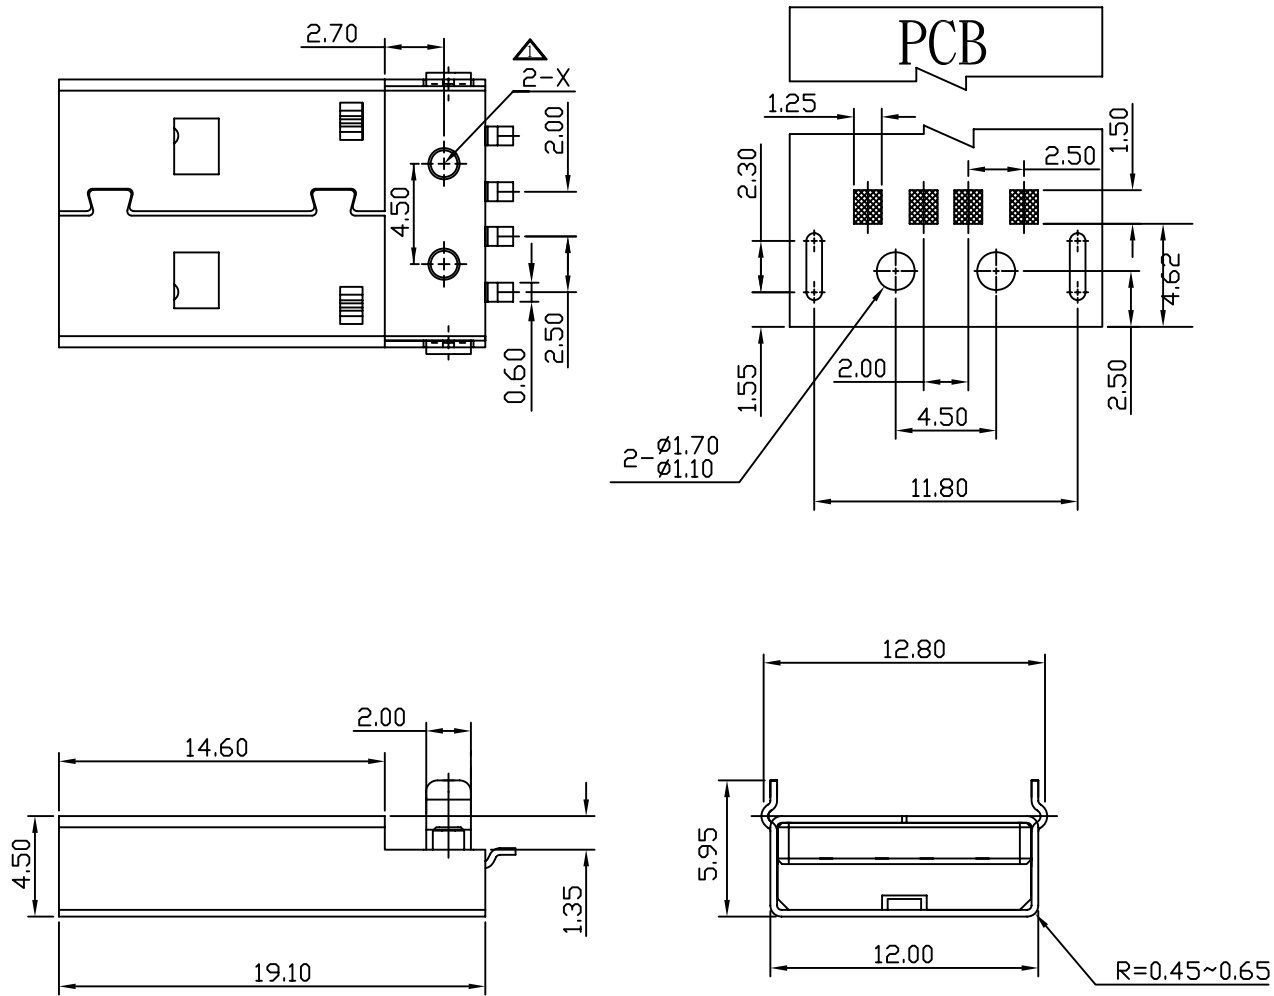

Material:

- (1). Insulator : NYLON , UL94V-0.
- (2). Contact : Brass.
- (3). Shell : Metal.
- (4). Finish :
 Contact = Gold plated on contact area &
 Tin plated on terminal area
 Shell = Nickel plated.

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

ORDER INFORMATION

USB-PWK28xx-4A-LF
 SERIES | | | | LEADFREE
 | | | | 4 PIN A TYPE
 MALE | | | | BK:BLACK
 90°SMT | | | | WH:WHITE
 | | | | 2.87mm
 KINK

DESCRIPTION: