
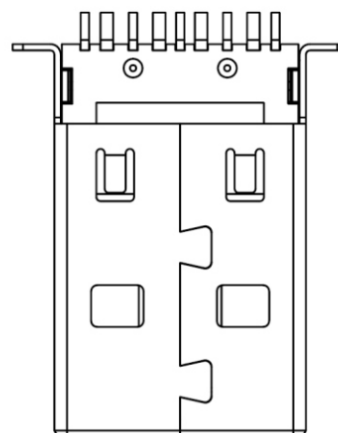
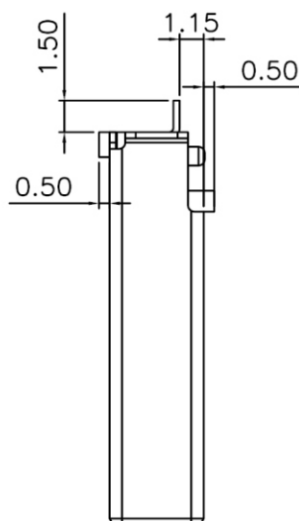
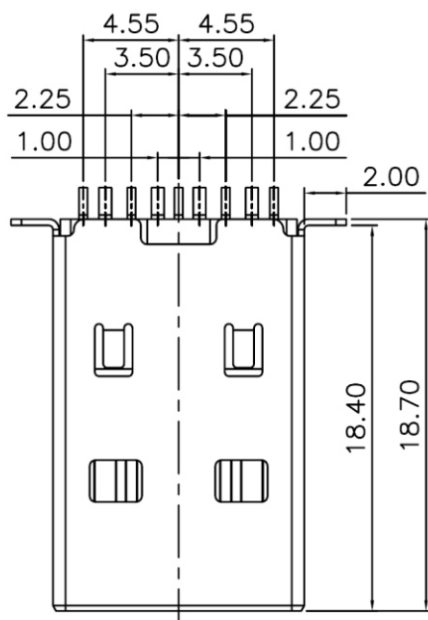


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	L.C.P	BLACK
2	HOUSING(TOP)	1	L.C.P	BLACK
3	CONTACT	9	Phosphor Bronze	Gold flash selective
4	SHELL	1	Stainless	Plating Ni

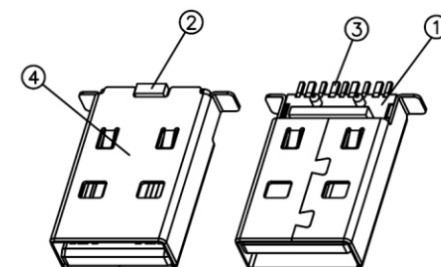

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: 1.5A

Applicable wire: AWG#28 Max.

Operating temperature: 0°C ~ +50°C

Storage temperature: -20°C ~ +60°C

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 250 VDC

Withstanding voltage: 500 VAC / minute

Contact resistance: 30 m ohms Max.

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 1500 cycles Min ; 200 cycles / hour.

Contact retention force: 4.2N(0.43kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION


X, ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

USB-PWPEBK-9A-LF
SERIES | LEADFREE
9 PIN A TYPE
BLACK
POST+EAR
90°SMT
MALE

DESCRIPTION: