

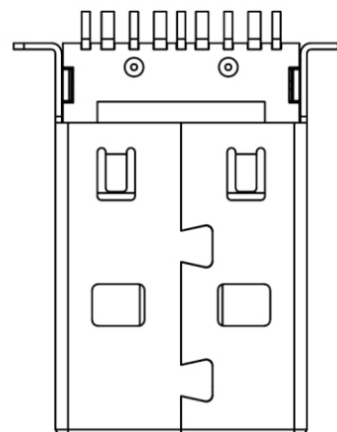
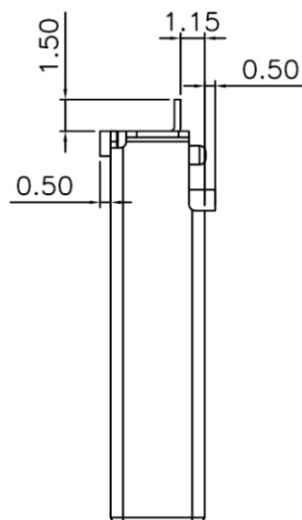
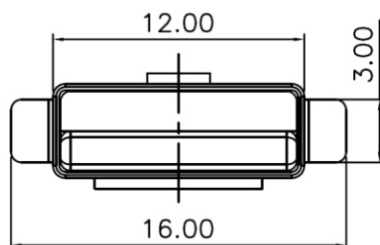


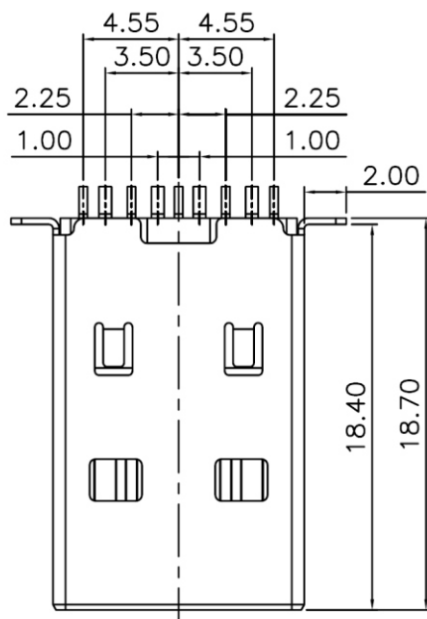

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	L.C.P	BLACK
2	HOUSING(TOP)	1	L.C.P	BLACK
3	CONTACT	9	Phosphor Bronze	Gold flash selective
4	SHELL	1	Stainless	Plating Ni

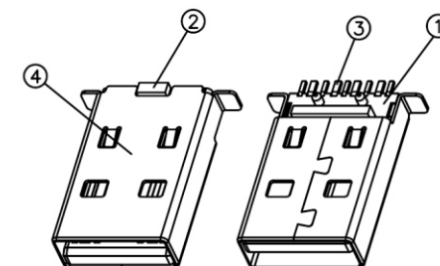

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: 1.5A

Applicable wire: AWG#28 Max.

Operating temperature: 0°C ~ +50°C

Storage temperature: -20°C ~ +60°C

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 250 VDC

Withstanding voltage: 500 VAC / minute

Contact resistance: 30 m ohms Max.

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 1500 cycles Min ; 200 cycles / hour.

Contact retention force: 4.2N(0.43kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION




X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-PWPEBKR-9A-LF
SERIES REEL BLACK POST+EAR 90°SMT
LEADFREE 9 PIN A TYPE

DESCRIPTION:

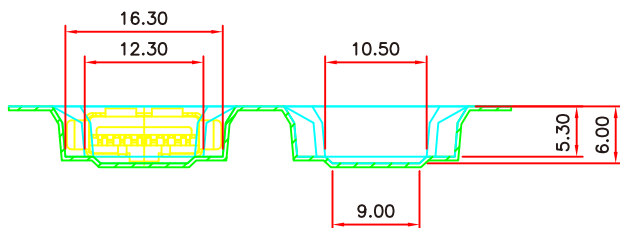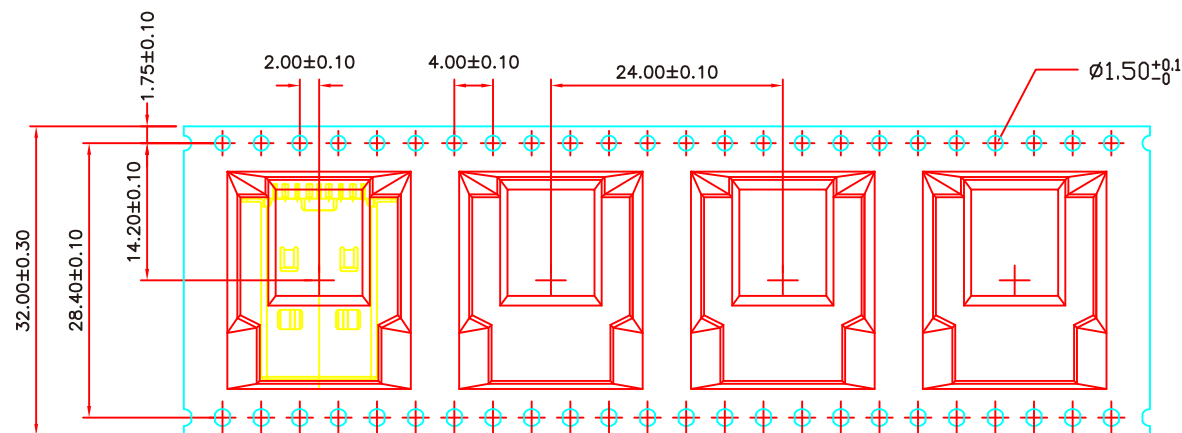

W	32.00±0.30
A0	12.30±0.10
B0	19.00±0.10
K0	6.00±0.10
K1	5.30±0.10

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy .
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.40 ± 0.05 mm.
6. Packing length per 22" reel : 31.0 Meters.
7. Component load per 13" reel : 400 pcs.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

USB-PWPEBK9-9A-LF
SERIES REEL LEADFREE
MALE POST+EAR 9 PIN A TYPE
90°SMT

DESCRIPTION: