


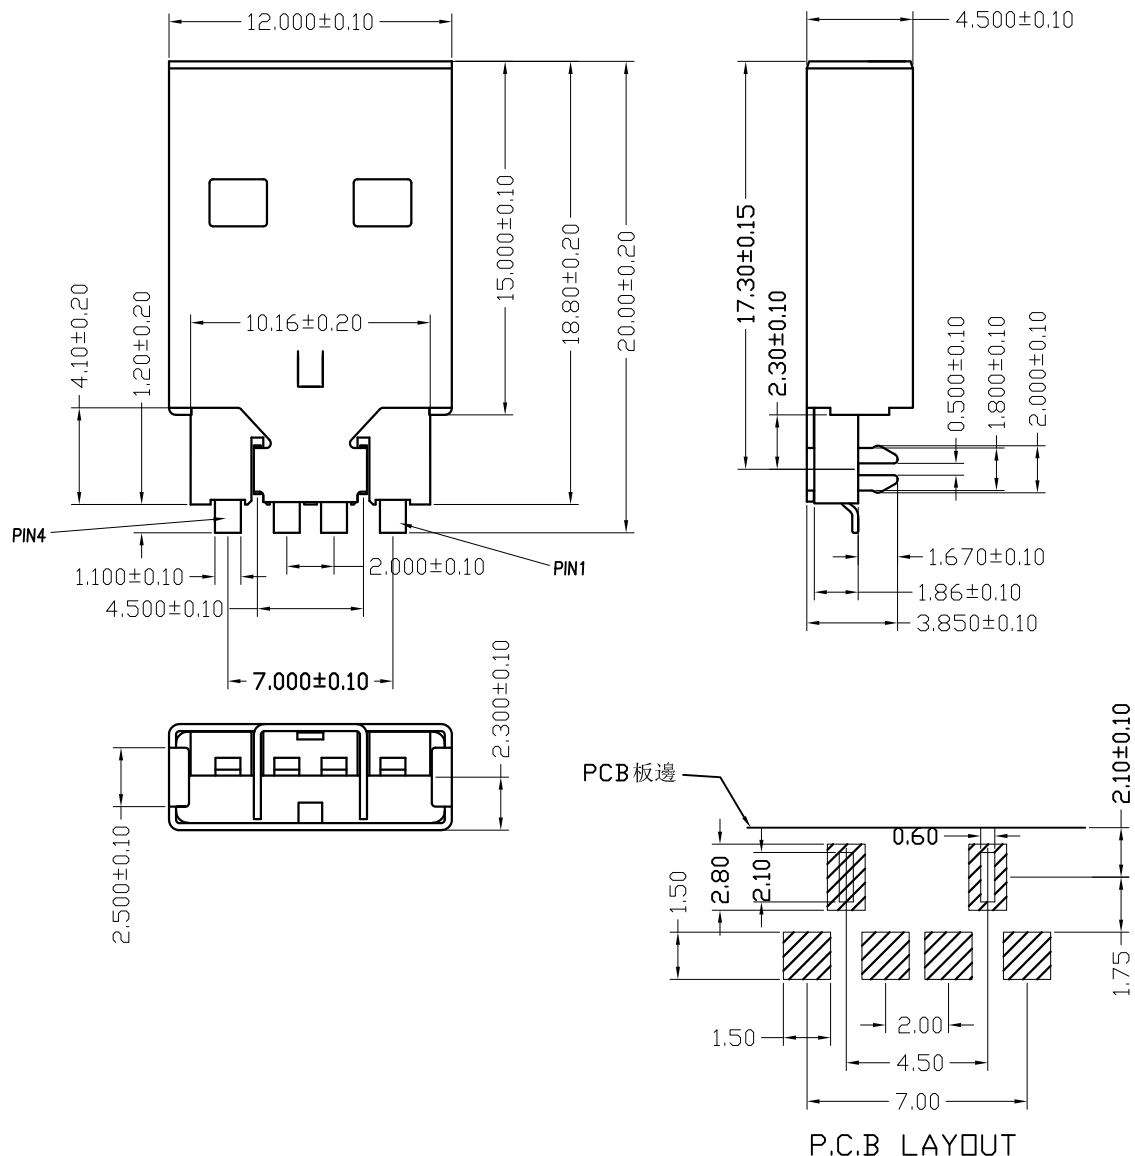

Note:

1.Material:

- 1.1 Insulator: PBT/LCP UL 94-V0 rated.
- 1.2 Contact: Brass, $t=0.25\text{mm}$.
- 1.3 Shell: Cold rolled steel / Brass, $t=0.30\text{mm}$.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: $30\text{ m}\Omega$ Max.
- 2.4 Insulation resistance: $1000\text{ M}\Omega$ Min at DC 500V.
- 2.5 Temperature range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$.

3.Finishes:

- 3.1 Contacts: Gold flashed 1u", 3u", 5u", 10U", 15u", 30u".
- 3.2 Shell: Nickel plated.

3	SHELL	1	Cold rolled steel //Brass	$T=0.3 \pm 0.02\text{mm}$	Nickel Plated	D3270XX
2	CONTACT	4	Brass	$T=0.25 \pm 0.02\text{mm}$	Gold Flashed	JCH0023
1	HOUSING	1	PBT/LCP		White/Black	
No.	Part Name	Q'ty	Material	Thickness	Finish	Notes

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

USB-PWZxx-4A-LF
SERIES
MALE
CLIP
90°SMT
LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE

DESCRIPTION: