
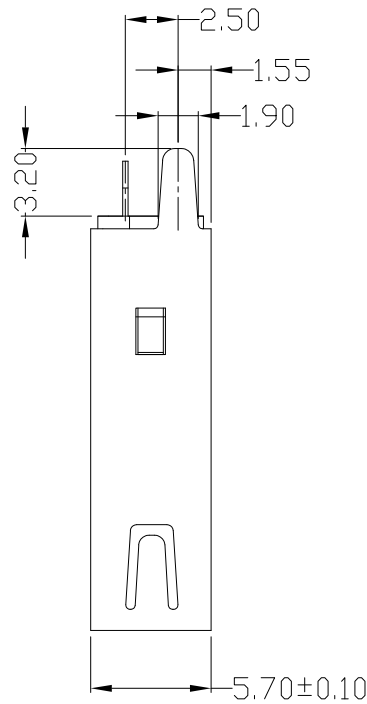


RECOMMENDED PCB LAYOUT

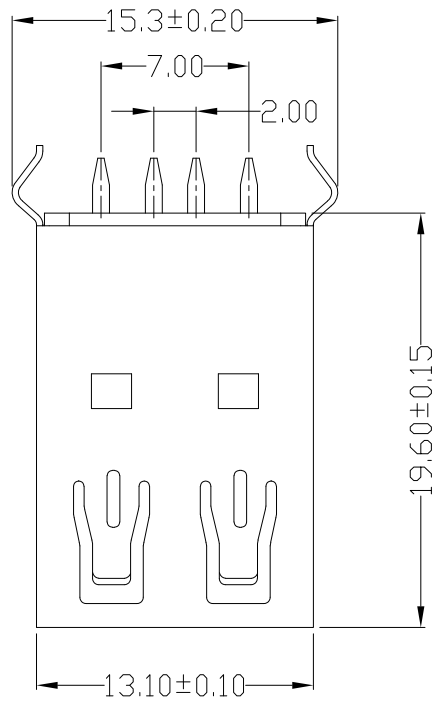

NOTES:

1. ELECTRICAL:
  - 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
  - 2) INSULATION RESISTANCE: 1000MΩ MIN;
  - 3) CONTACT RESISTANCE: 30mΩ MAX;
  - 4) WITHSTANDING VOLTAGE: 500V AC;
  - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
  - 1) Mating Force: 35N MAX
  - 2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

Bill of materials:

3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.30

.XX ± 0.25

.XXX ± 0.15

ANG ±

PJECTION

照片框

ORDER INFORMATION

USB-SDFX196xx-4A-LF  
SERIES | | | | LEADFREE  
4 PIN A TYPE  
BK:BLACK  
WH:WHITE  
FEMALE | | | | HIGH 19.60mm  
DIP 180° FLANGELESS

DESCRIPTION: USB AF DIP 180度 全包 无卷边弯脚有后塞 19.6