


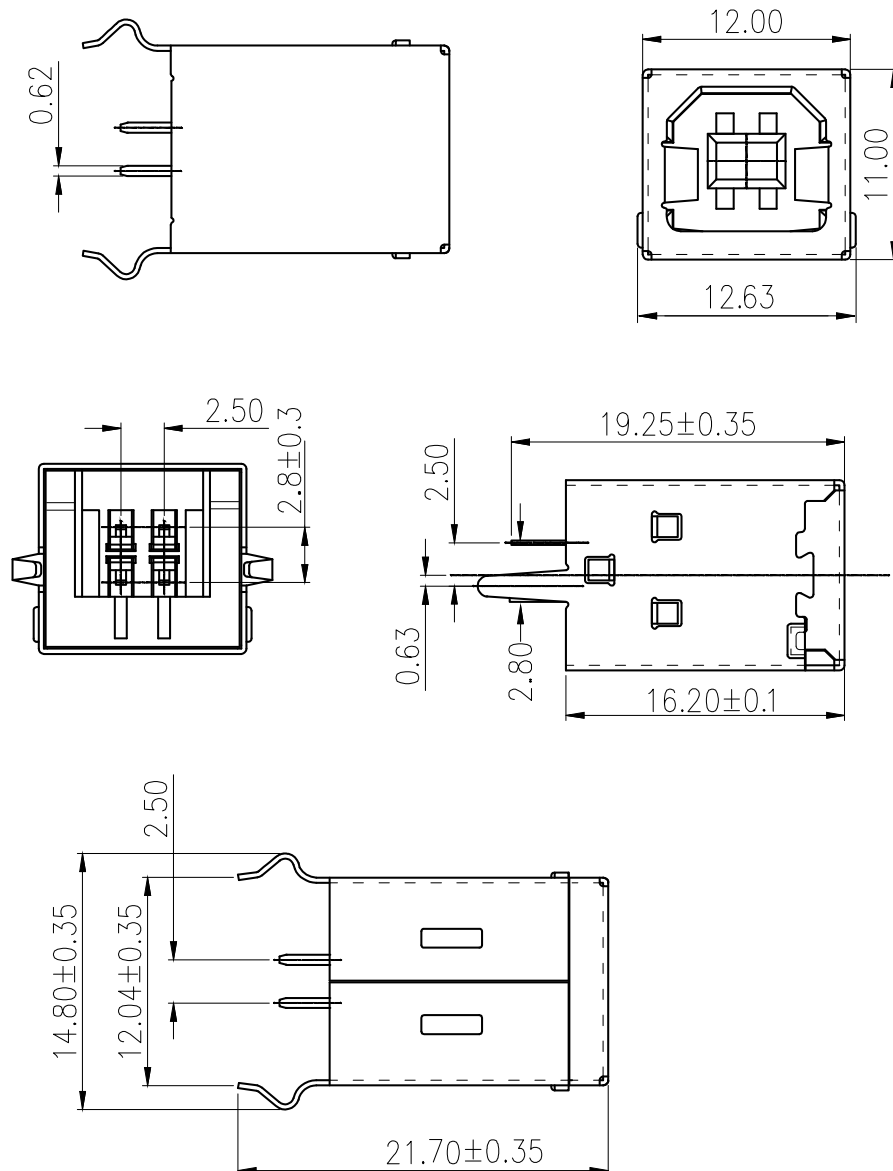

NOTES:

1.MATERIAL:

- 1.1 Housing:PBT ,UL94-HB
- 1.2 terminals:Copper Alloy
- Gold plated in contact area:
- Tin 40u"min plated in termination
- Nickel Plated overall

1.3 Shell:SPCC or Brass t=0.30mm,

Nickel 40u"min Plated overall

2.ELECTRICAL CHARACTERISTICS:


- 2.1 Rating Current :1.5 Ampere
- 2.2 Rating Voltage :30 V Max
- 2.3 Contact Resistance:30 Milli ohms
- 2.4 Insulation Resistance:1000 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:

- 3.1 Connector Mating force: 35N MAX(3.57Kgf)
- 3.2 Connector Unmating force:10N min(1.02Kgf)
- 3.3 Durability:1500Cycles.

4.ENVIRONMENT CHARACTERISTICS:

- 4.1 Operating temperature:-0℃ to +50℃
- 4.2 Storage temperature:-20℃ to +60℃

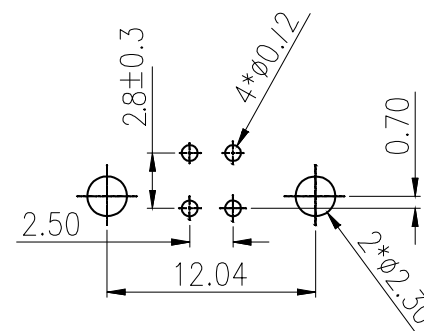

PCB.LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

ORDER INFORMATION

USB-SDR28WH-4B-LF
SERIES | | | | LEADFREE
4 PIN B TYPE
WHITE
ROW 2.8mm
DIP 180°
FEMALE

DESCRIPTION: USB BF 180度彎腳 L:21.7